







ROHS

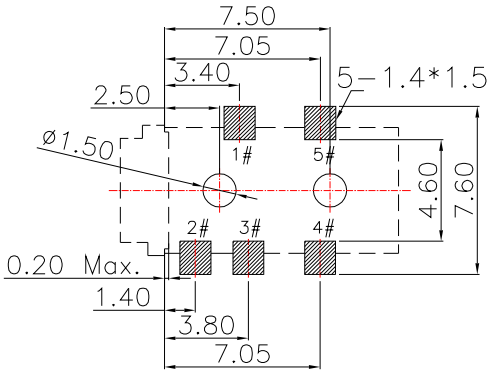


3D VIEW






RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

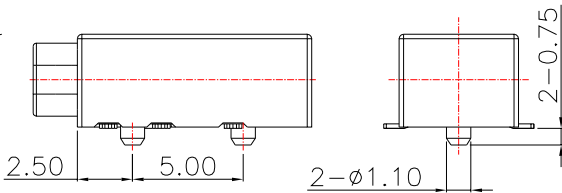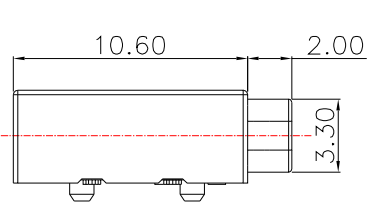

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;
8. TERPROOF LEVEL: IPX7;

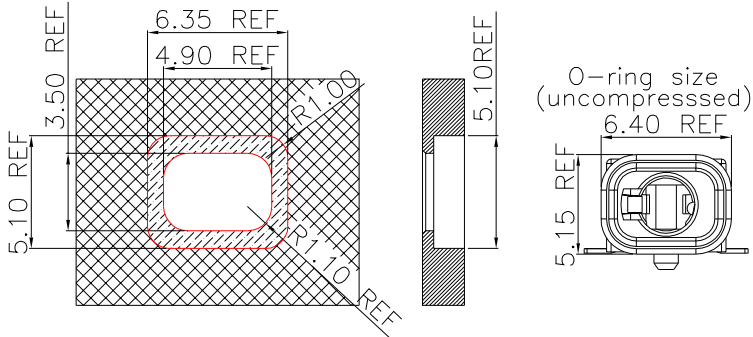

面板开孔参考尺寸

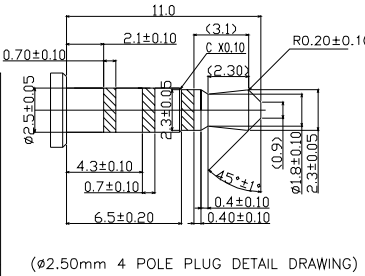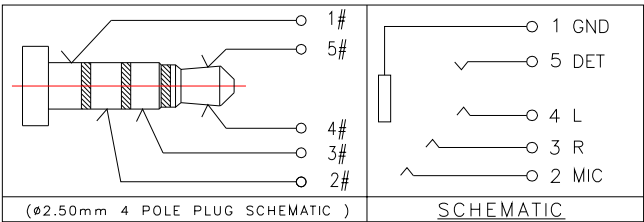

③	Silica gel	—	1	Silica gel	Black	—
②	Terminal	—	5	phor bronze	Al Plating	—
①	Housing	—	1		Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE			
DRAWN						
CHECKED				TITLE:		
APPROVALS				PART NO.		
TOLERANCES ARE			30~100 10~30 5~10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	UNIT: mm
					±2'	SCALE: 1:1
						PROJ: 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			