

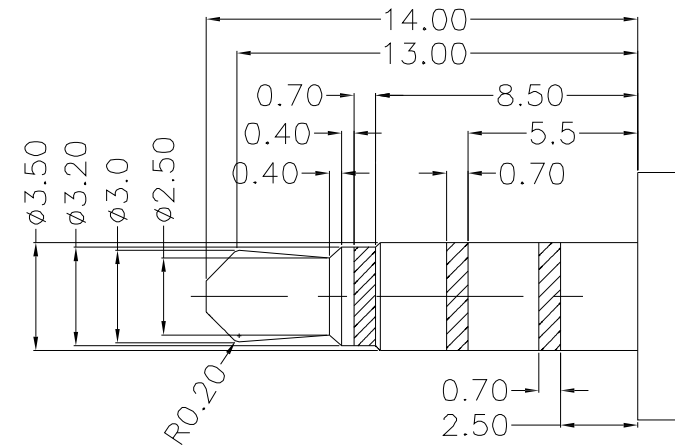
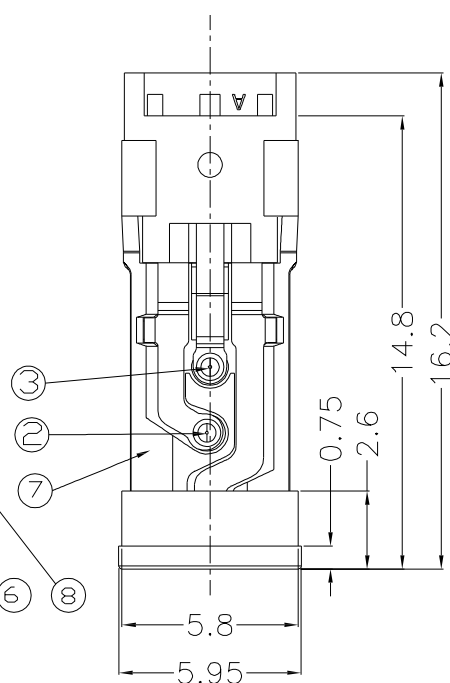
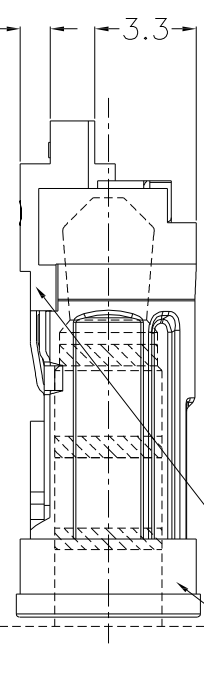
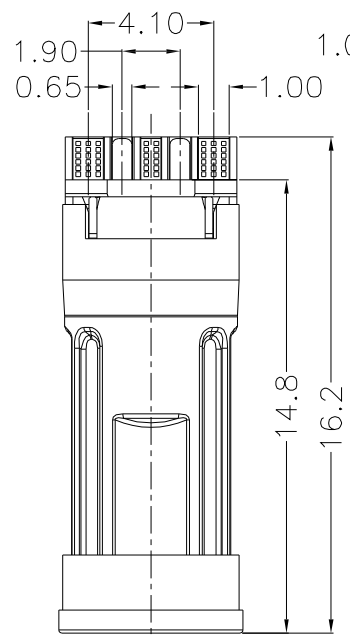
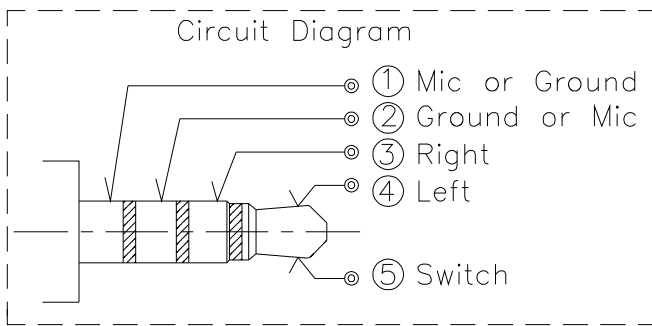
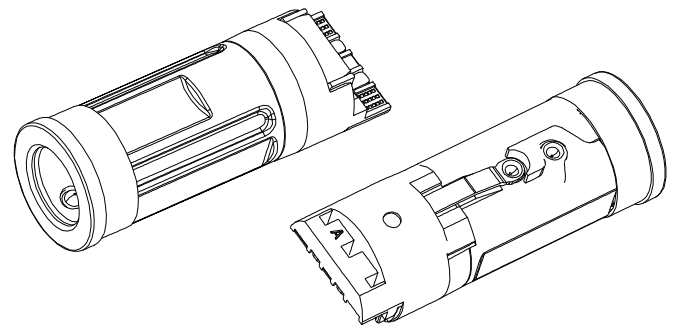




ø3.5mm 4POLE PLUG(TOLERANCE: ±0.05)



Rating:1A 12V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-25. ~85.
Operating force:30N Min
Operating Life:5,000cycles

⑧	Cover	—	1	Thermoplastics	White	
⑦	Housing	—	1	Thermoplastics	White	
⑥	Sleeve	—	1	Copper Alloy	Ni Plating	
⑤	Switch Contact	—	1	Copper Alloy	Ni Plating	
④	Left Contact	—	1	Copper Alloy	Ni Plating	
③	Right Contact	—	1	Copper Alloy	Ni Plating	
②	Mic Contact	—	1	Copper Alloy	Ni Plating	
①	Ground Contact	—	1	Copper Alloy	Ni Plating	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE				
DRAWN							
CHECKED					TITLE:		
APPROVALS					PART NO.		
TOLERANCES ARE	30~...	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
	10~30	±0.20					
	5~10	±0.15					
	~ 5	±0.10					
			±2°	DRAWING NO.	_____	SHEET 1 OF 1	

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.