

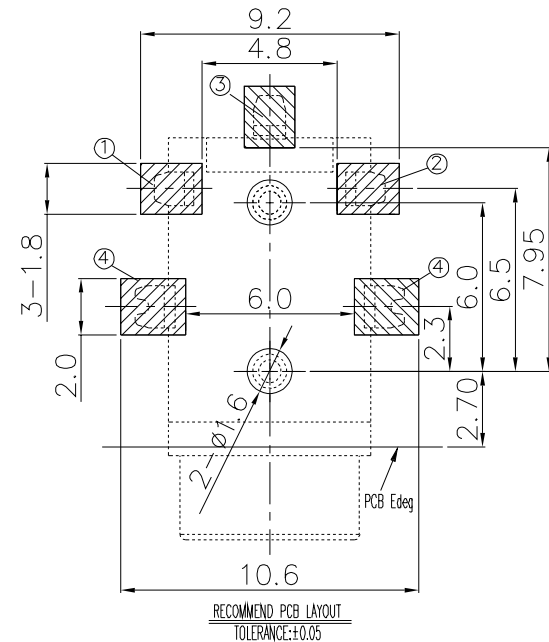
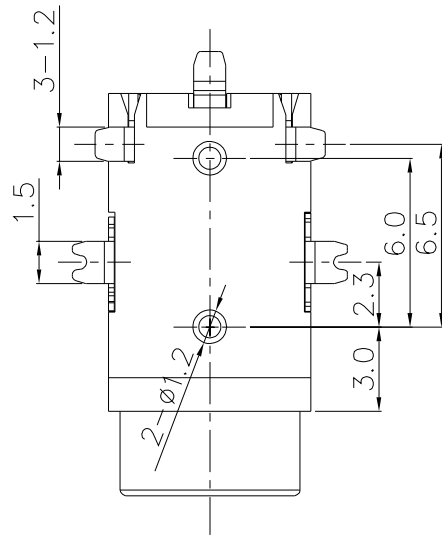
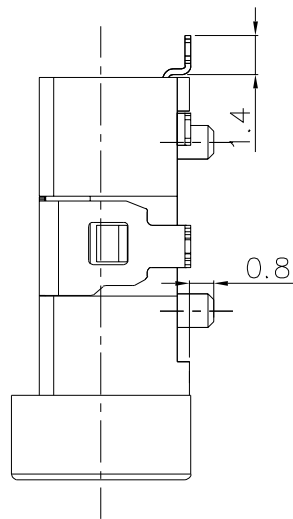
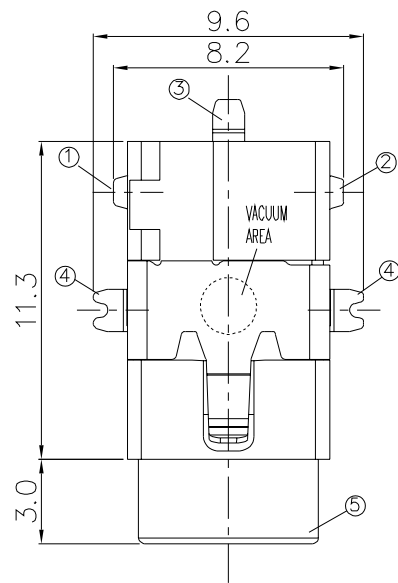


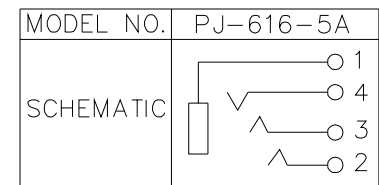

RECOMMEND PCB LAYOUT
TOLERANCE:±0.05

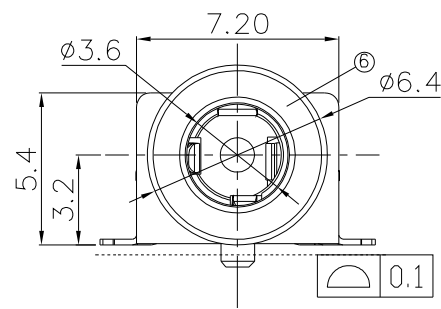

- NOTES:
- 1.CONTACT CURRENT RATING:12V 1A.
 - 2. CONTACT RESISTANCE:100mQ MAX.;
 - 3. INSULATION RESISTANCE: 100M MIN.500V DC;
 - 4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - 5. DURABILITY: 5,000 CYCLES MIN.;
 - 6. CONNECTOR MATING FORCES:29.4N (3.00Kgf) MAX.;
 - 7. CONNECTOR UNMATING FORCES:2.94N(0.30Kgf) MIN.;

⑤	Housing	_____	1	Nylon	Black	_____
④	Terminal 4	_____	1	Copper Alloy	Silver-plated	_____
③	Terminal 3	_____	1	Copper Alloy	Silver-plated	_____
②	Terminal 2	_____	1	Copper Alloy	Silver-plated	_____
①	Terminal 1	_____	1	Copper Alloy	Silver-plated	_____
ITEM	PART NAME	Serial number	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE				
DRAWN							
CHECKED				TITLE:			
APPROVALS				PART NO.			
TOLERANCES ARE		30~...	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.20				
		5~10	±0.15				
		~ 5	±0.10				
		±2'		DRAWING NO.	_____	SHEET 1 OF 1	

_____	A	_____	NEW	_____	_____	_____
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.