

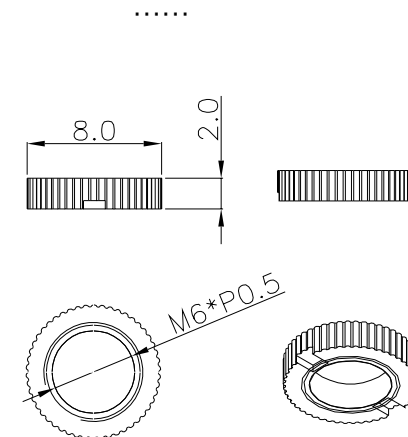
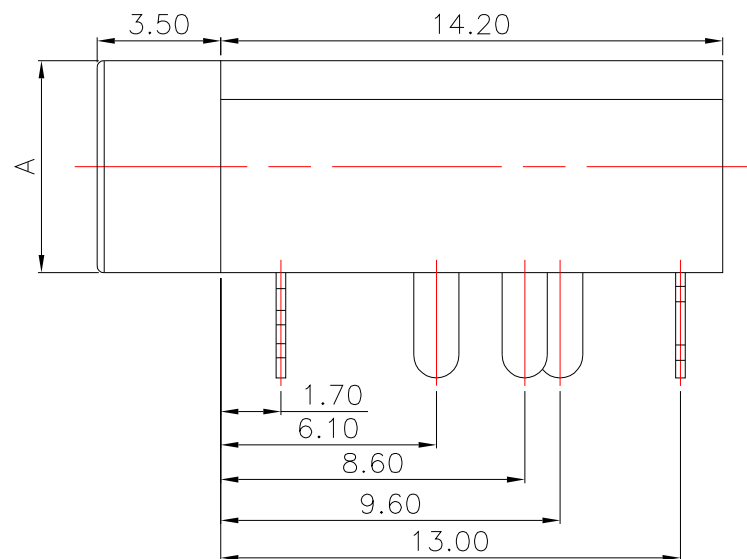


ROHS

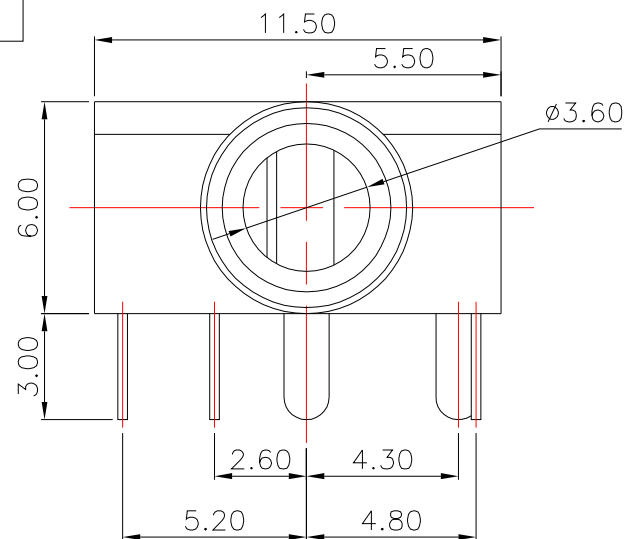

P.C.B LAYOUT(copper-sided view)

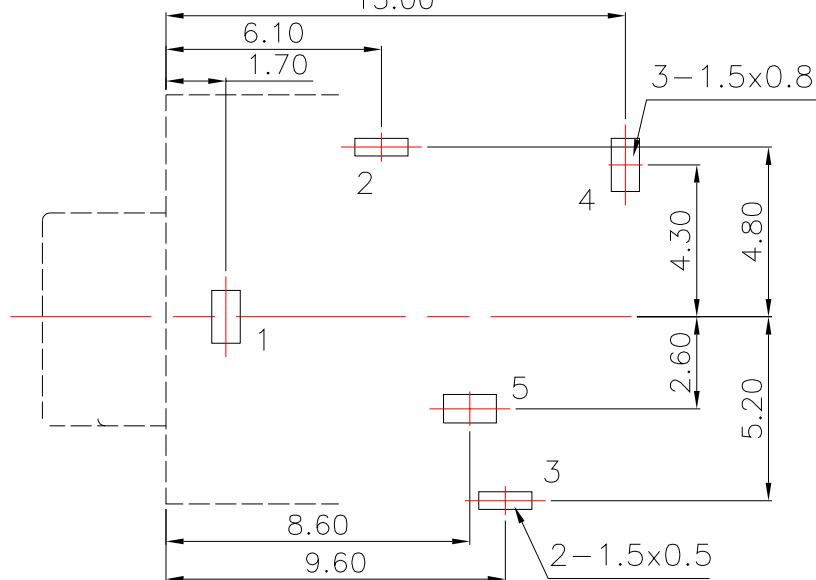

Model No.	A=φ6	PJ-3240-A	PJ-3240-B	PJ-3240-C
	A=M6xP0.5	PJ-3240M-A	PJ-3240M-B	PJ-3240M-C
Schematic				

Model No.	A=φ6	PJ-3240-D	PJ-3240-E
	A=M6xP0.5	PJ-3240M-D	PJ-3240M-E
Schematic			

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20. ~70.
Operating force:3-20N
Operating Life:5,000cycles

②	Terminal	——	5	Phosphor bronze	Au Plating	——	
①	Housing	——	1	Nylon	Black	——	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK	
APPROVALS			DATE				
DRAWN							
CHECKED			TITLE:				
APPROVALS			PART NO.				
TOLERANCES ARE	30~..	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
	10~30	±0.20					
	5~10	±0.15					
	~ 5	±0.10					
			±2'	DRAWING NO.	———	SHEET 1 OF 1	

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.