

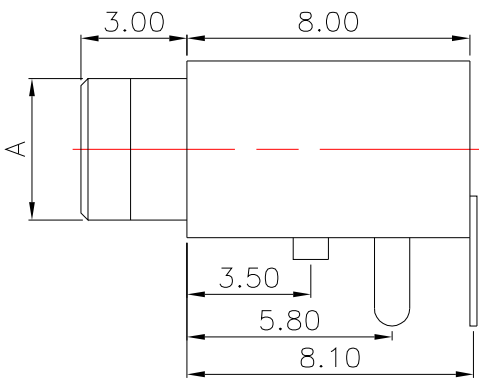


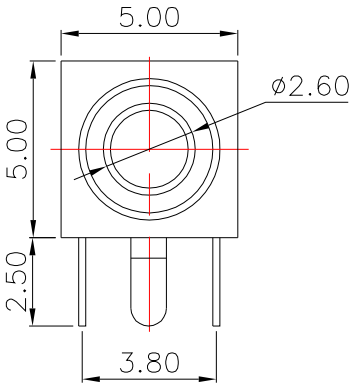

P.C.B LAYOUT(copper-sided view)

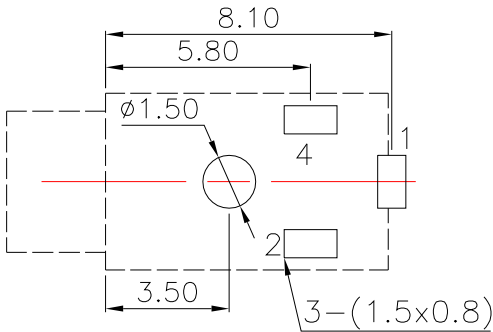

Model NO	A=φ4	PJ-2100
	A=φ5	PJ-2100A
Schematic		

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20. ~70.
Operating force:3-20N
Operating Life:5,000cycles

②	Terminal	—	3	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE			
DRAWN						
CHECKED				TITLE:		
APPROVALS				PART NO.		
TOLERANCES ARE	30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10~30	±0.20				
	5~10	±0.15				
	~ 5	±0.10	±2'	DRAWING NO.		SHEET 1 OF 1

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.