
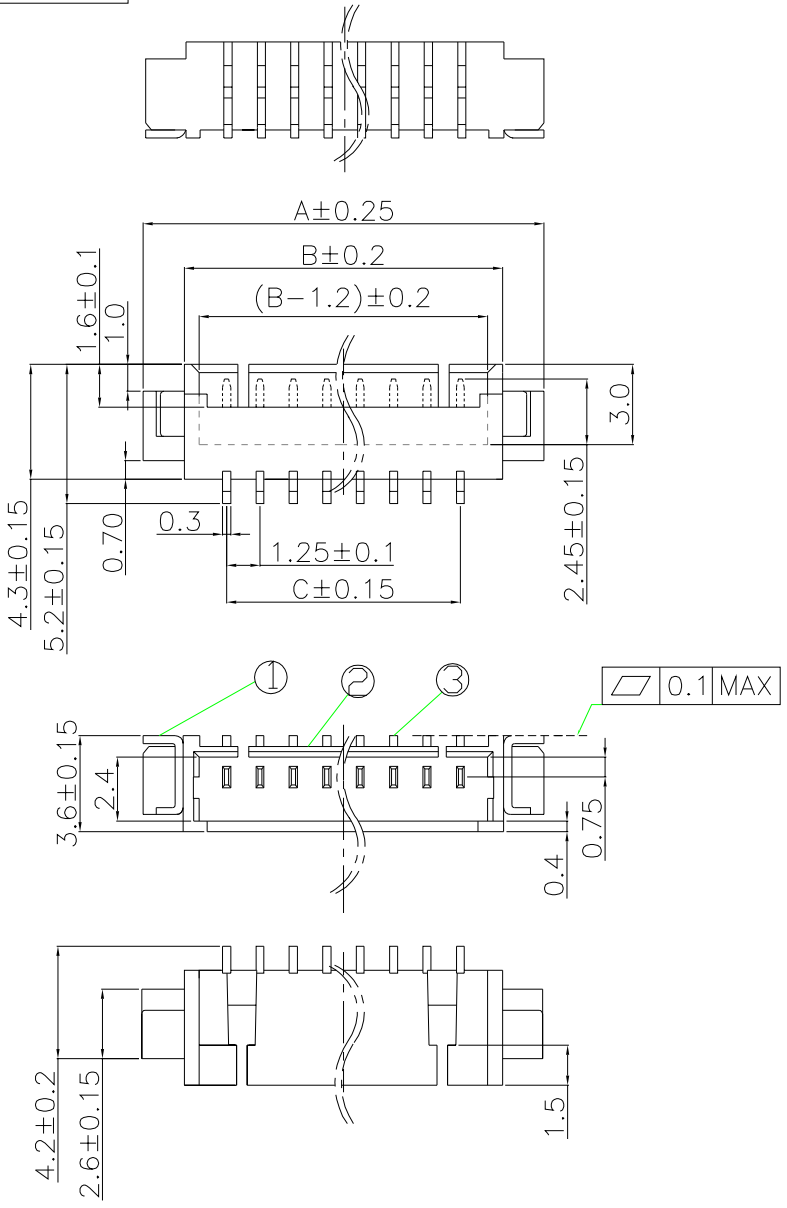


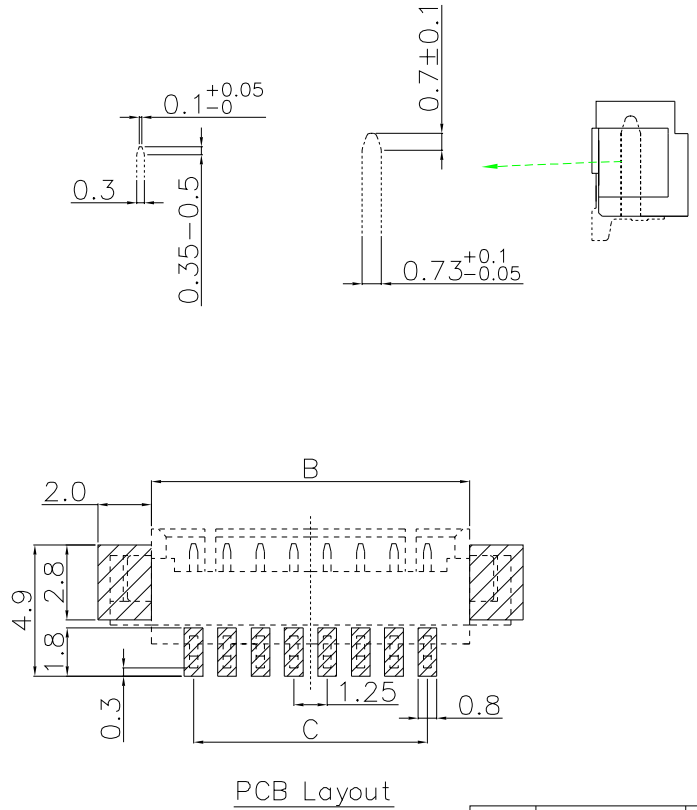

- SPECIFICATIONS
- ◆ Rated voltage: 125V DC,AC(rms)
 - ◆ Rated Current: 1A
 - ◆ Withstand voltage: 500V AC/min.
 - ◆ Working Temp : $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 - ◆ Insulation resistance: $\cdot 100 \text{ M}\Omega$
 - ◆ Contact resistance: $\cdot 20 \text{ m}\Omega$

No. of Contacts	DIMENSIONS		
	A	B	C
2P	7.50	4.40	1.25
3P	8.75	5.65	2.50
4P	10.0	6.90	3.75
5P	11.25	8.15	5.00
6P	12.50	9.40	6.25
7P	13.75	10.65	7.50
8P	15.00	11.90	8.75
9P	16.25	13.15	10.0
10P	17.50	14.40	11.25
11P	18.75	15.65	12.50
12P	20.00	16.90	13.75
13P	21.25	18.15	15.00
14P	22.50	19.40	16.25
15P	23.75	20.65	17.50
16P	25.00	21.90	18.75
17P	26.25	23.15	20.00
18P	27.50	24.40	21.25
19P	28.75	25.65	22.50
20P	30.00	26.90	23.75

③	Solder Tab	—	2	Brass	Sn-PLATED	—
②	PIN	—	—	Phosphor bronze	Sn-PLATED	—
①	Base	—	1	LCP	Beige	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE			
DRAWN						
CHECKED				TITLE:		
APPROVALS				PART NO.		
TOLERANCES ARE			30~ 10~30 5~10 ~ 5	± 0.30 ± 0.20 ± 0.15 ± 0.10	ANGLE	UNIT: mm
				$\pm 2'$	SCALE: 1:1	PROJ:
			DRAWING NO.		SHEET 1 OF 1	

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.