

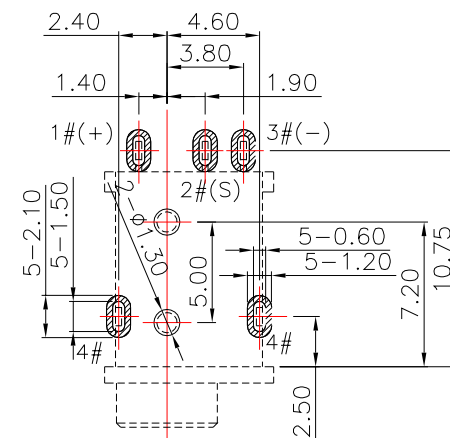
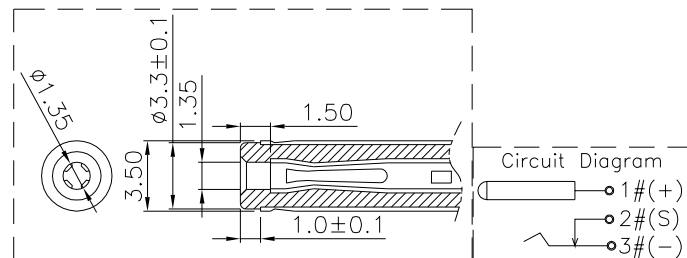

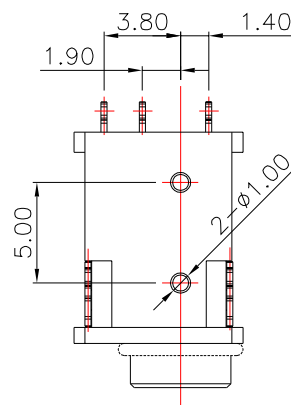




ROHS

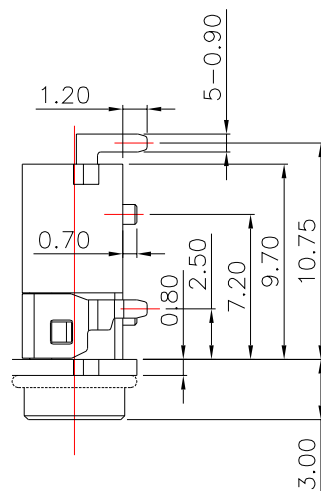


RECOMMEND PCB LAYOUT
TOLERANCE:±0.05

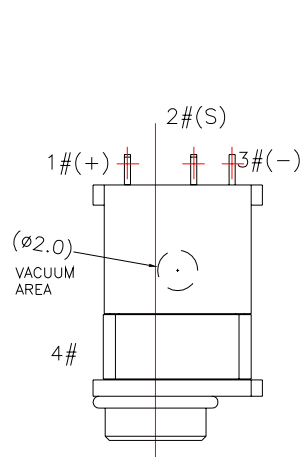

1. CURRENT RATING: 24V&3A MAX.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 35N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;
8. TERPROOF LEVEL: IPX7;



3D VIEW

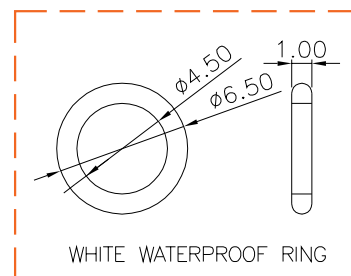

WHITE WATERPROOF RING

③	Waterproof ring	——	1	Silica gel	White	——
②	Terminal	——	4	Copper alloy	Ni/Au Plating	——
①	Housing	——	1	High temperature plastic	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE			
DRAWN		DESIGN	2023.3.3			
CHECKED						
APPROVALS				PART NO.		
TOLERANCES ARE	30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	
	10~30	±0.20				
	5~10	±0.15				
	~5	±0.10				
			±2°	DRAWING NO.	———	SHEET 1 OF

_____	A	_____	NEW	_____	_____	_____
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.