

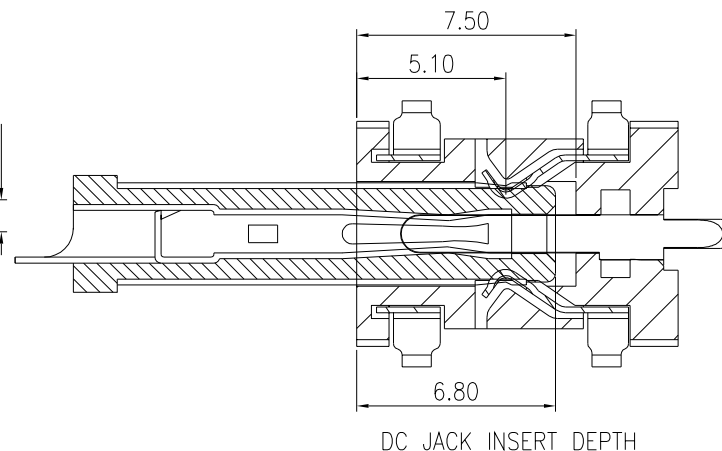
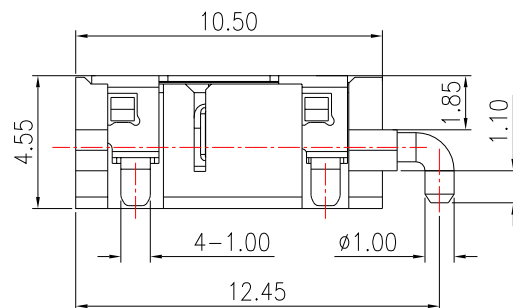
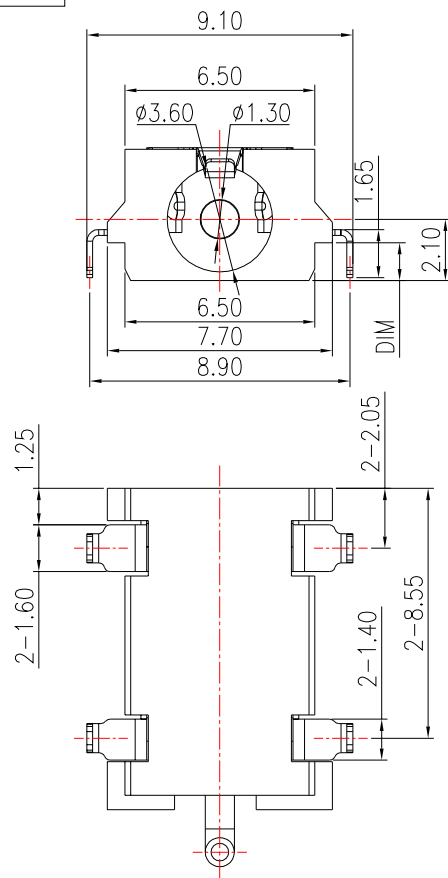




Specifications:
Rating: 3A 24V
Contact Resistance: 50 m Ω Max.
Operating temperature: -20 ~ 70.
Operating force: 2.94-29.4N
Operating Life: 5,000 cycles Min

Model NO	DIM
DC-183	0.80
DC-183A	1.30
DC-183B	1.50

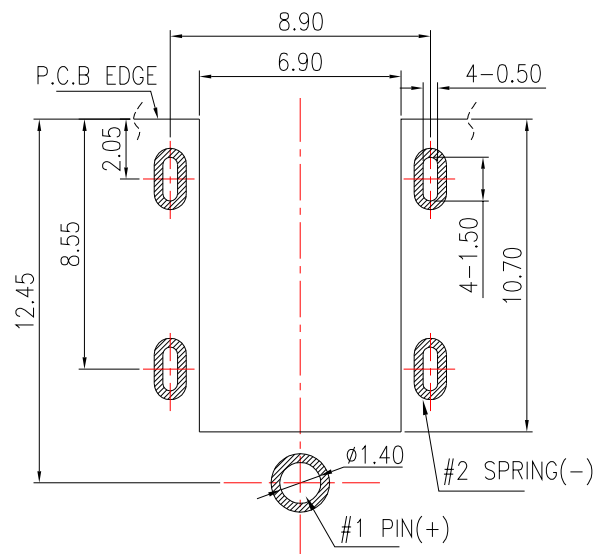

CIRCUIT DIAGRAM

③	Center Pin	———	1	COPPER ALLOY	Au Plating	———
②	Terminal	———	1	COPPER ALLOY	Au Plating	———
①	Housing	———	1	HTP	Black	———
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE			
DRAWN						
CHECKED			TITLE:			
APPROVALS			PART NO.			
TOLERANCES ARE		30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15			
		~ 5	±0.10			
		±2"		DRAWING NO.	———	PROJ: 
					SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.