




ROHS

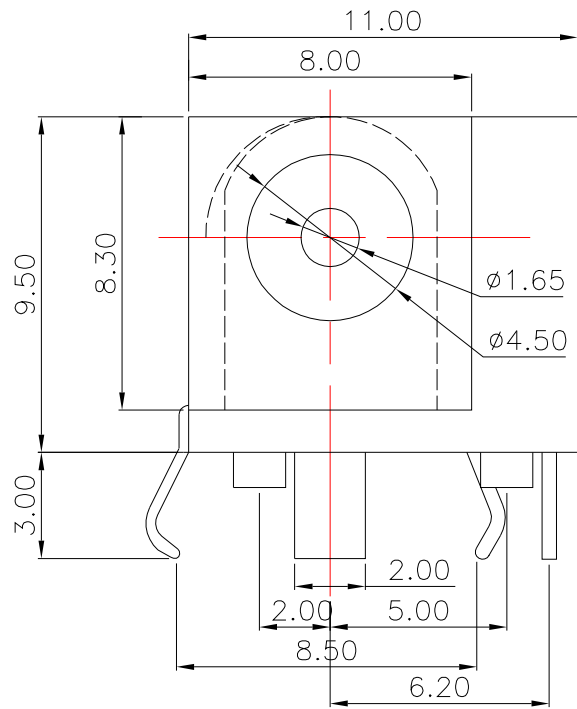


P.C.B LAYOUT(copper-sided view)

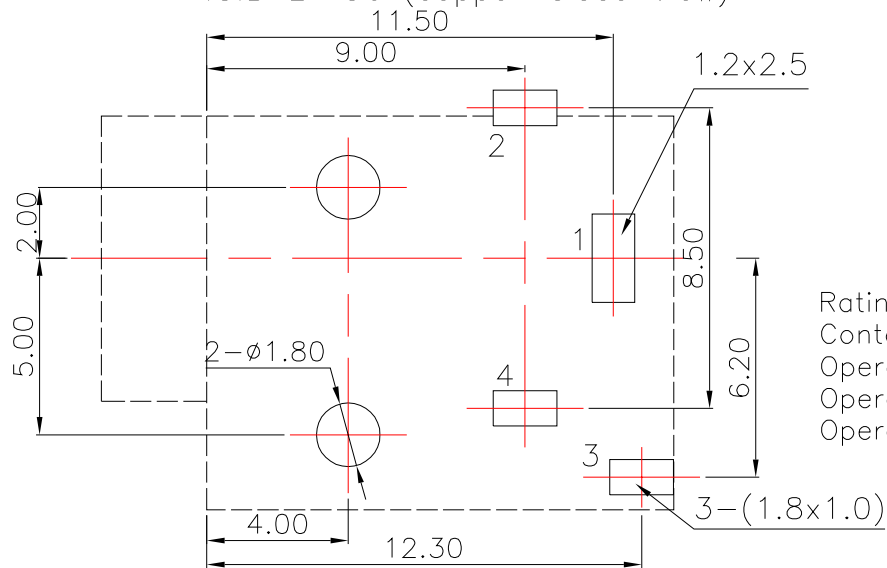

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20~70.
Operating force:3-20N
Operating Life:5,000cycles

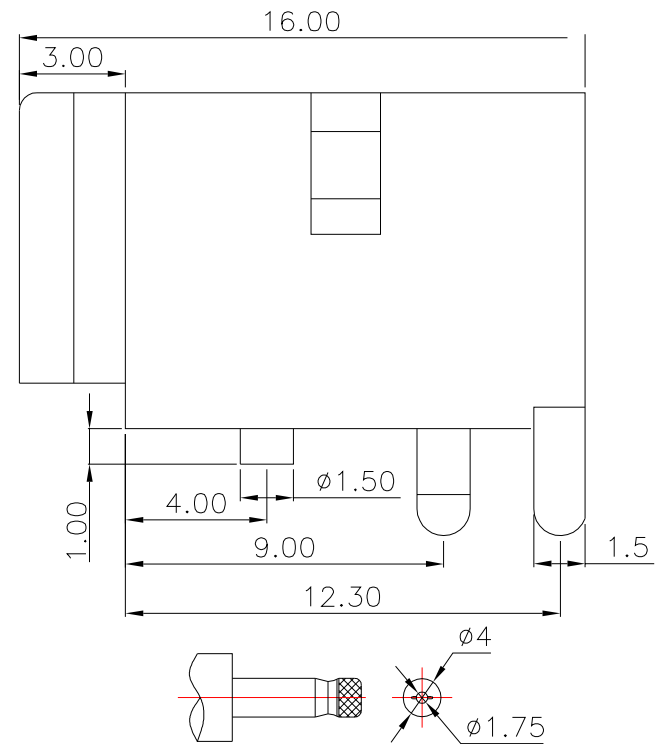

DC MATE PLUG

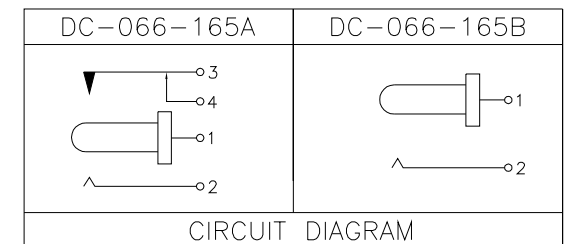

②	Terminal	—	∠	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE			
DRAWN						
CHECKED				TITLE:		
APPROVALS				PART NO.		
TOLERANCES ARE			30~10~5	±0.30±0.20±0.15±0.10	ANGLE	UNIT: mm
				±2'	SCALE: 1:1	PROJ:
					DRAWING NO.	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			