

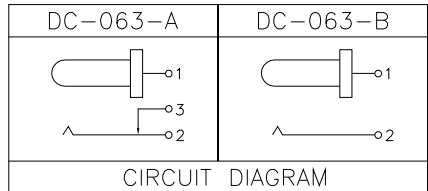
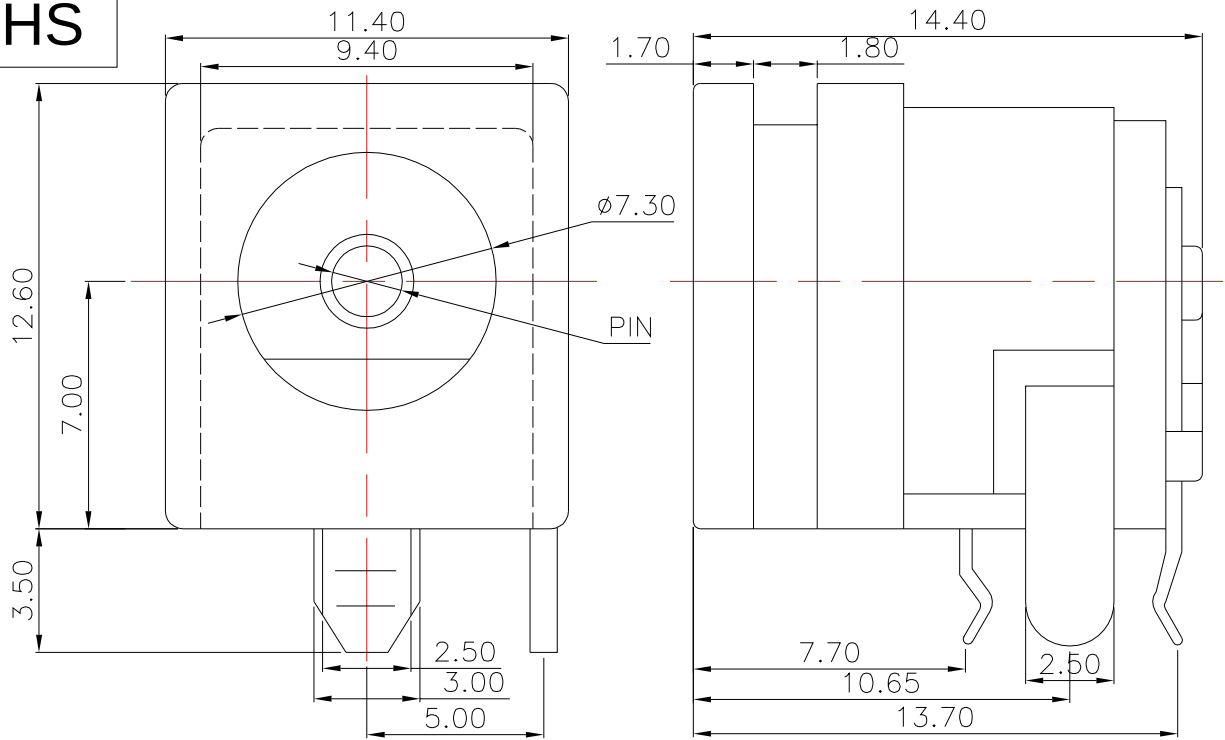


ROHS

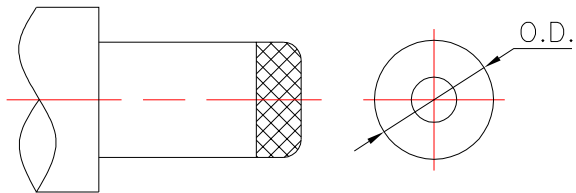

Model No.	1	2	3
PIN	ø2.0	ø2.5	ø3.0
DC PLUG O.D.	ø5.5	ø5.5	ø6.55

P.C.B LAYOUT(copper-sided view)

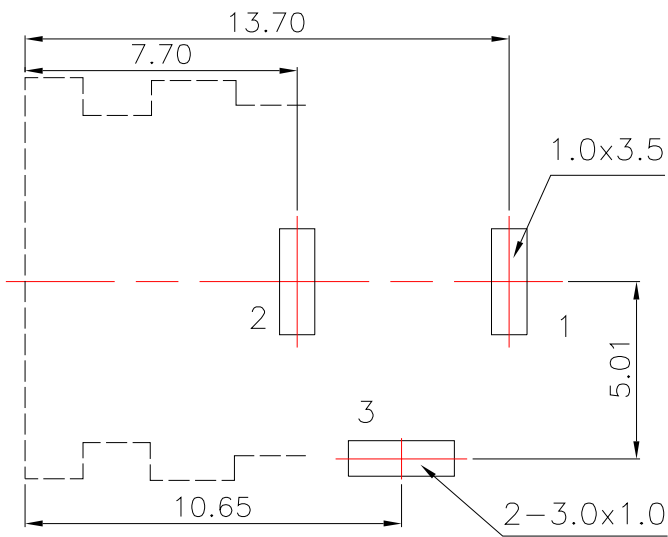

DC MATE PLUG

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20. ~70.
Operating force:3~20N
Operating Life:5,000cycles

②	Terminal	_____	3	Phosphor bronze	Au Plating	_____	
①	Housing	_____	1	Nylon	Black	_____	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK	
APPROVALS		DATE					
DRAWN							
CHECKED				TITLE:			
APPROVALS				PART NO.			
TOLERANCES ARE		30~...	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.20				
		5~10	±0.15				
		~ 5	±0.10				
		±2°	DRAWING NO.	_____	SHEET 1 OF 1		

_____	A	_____	NEW	_____	_____	_____
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.