

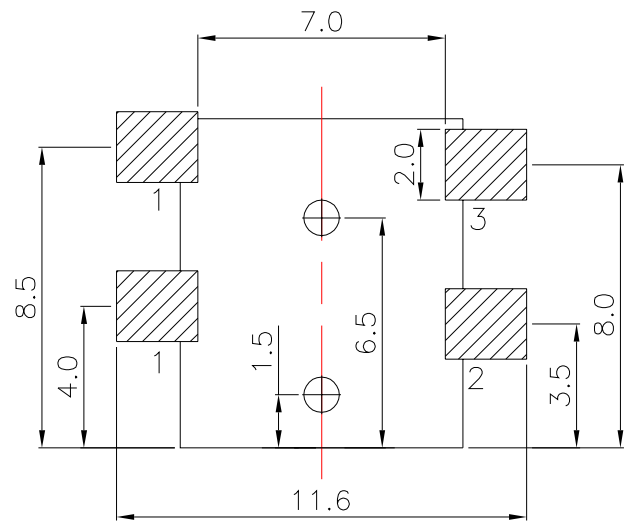
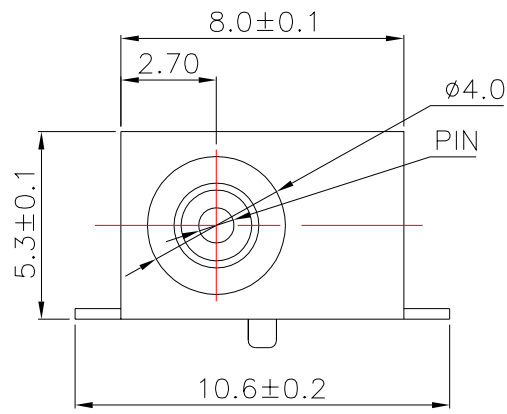
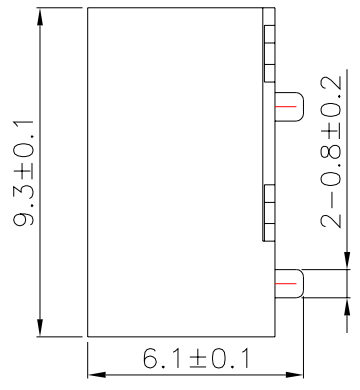


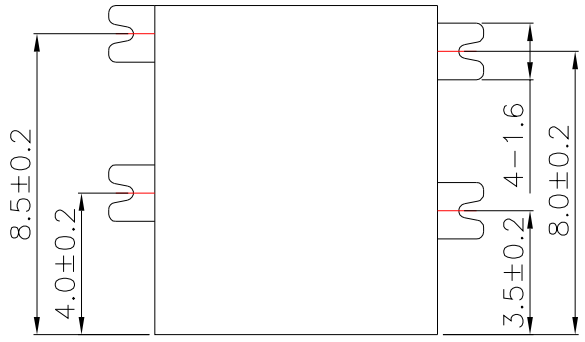

P.C.B LAYOUT TOP VIEW

PIN=ø1.0	
PIN=ø1.3	
PIN=ø1.65	

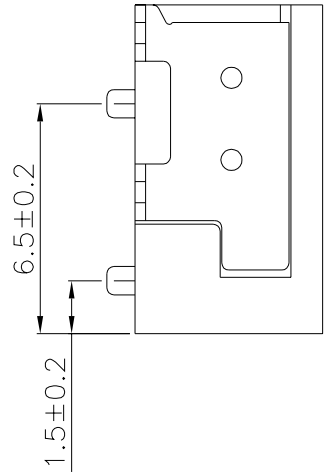

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20· ~70·
Operating force:3-20N
Operating Life:5,000cycles

③	Other Terminal	——	3	Brass	Sn Plating	——	
②	Leaf spring	——	1	phor bronze	Sn Plating	——	
①	Housing	——	1	P	Black	——	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK	
APPROVALS			DATE				
DRAWN							
CHECKED				TITLE:			
APPROVALS				PART NO.			
TOLERANCES ARE		30~~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.20				
		5~10	±0.15				
		~ 5	±0.10				
		±2'	DRAWING NO.	——	SHEET 1 OF 1		

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.