

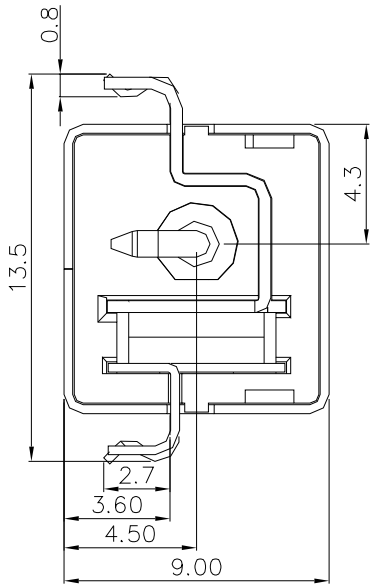
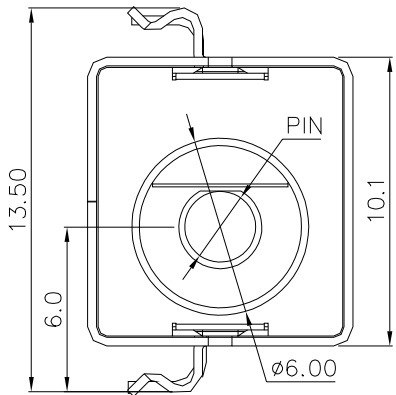
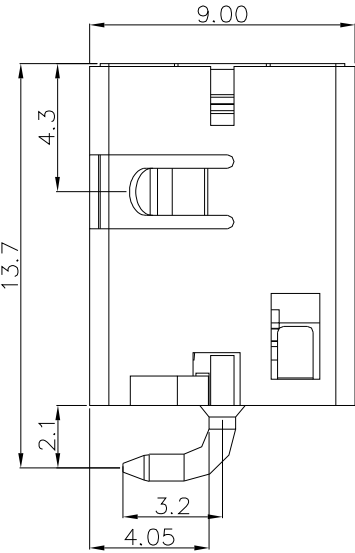
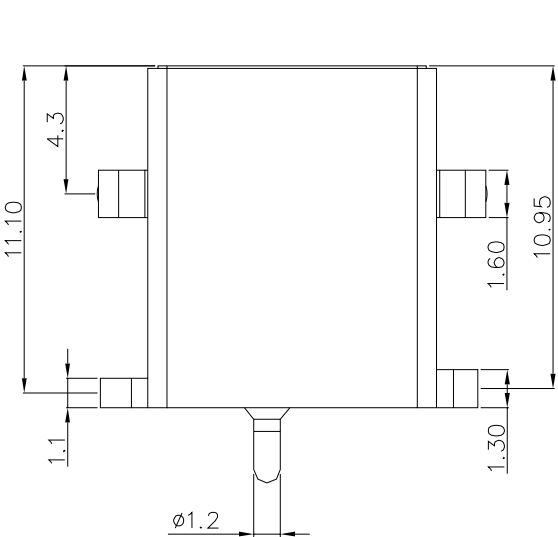
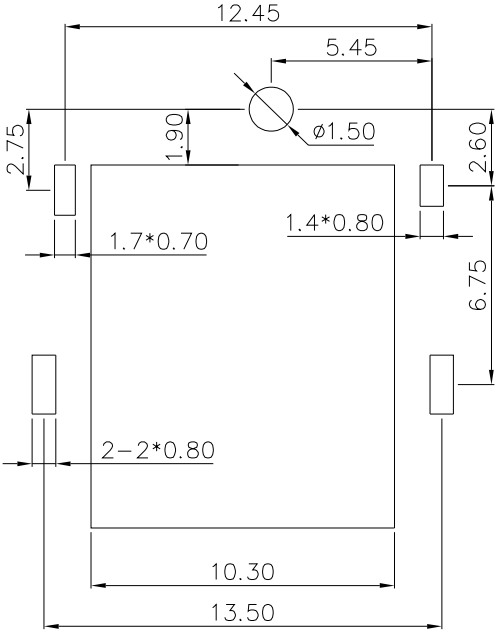




NOTE:
1.Rating:8A 24V DC
2.Contact Resistance:≤0.03Ω
3.Insulated resistance:· 100MΩ
4.Operating temperature:−30· ~70·
5.Operating force:3−20N
6.Operating Life:5,000cycles

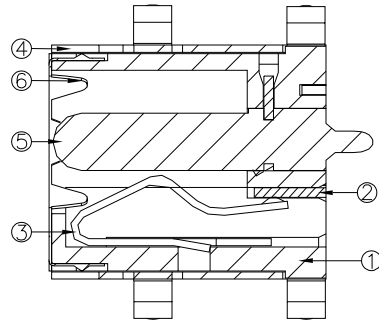

PCB LAYOUT

PIN	ø1.65	ø2.0	ø2.5
APPD	165	20	25

⑥	Cover	——	1	SUS	——	——
⑤	PIN	——	1	Phosphor bronze	Copper tin	——
④	Shield cover	——	1	Brass	Copper tin	——
③	Shrapnel	——	1	Phosphor bronze	Copper tin	——
②	Copper sheet	——	1	Brass	Copper tin	——
①	Housing	——	1	PPA	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN						
CHECKED				TITLE:		
APPROVALS				PART NO.		
TOLERANCES ARE	30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ.: 
	10~30	±0.20				
	5~10	±0.15				
	~ 5	±0.10				
			±2'	DRAWING NO.	——	SHEET 1 OF 1

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.