

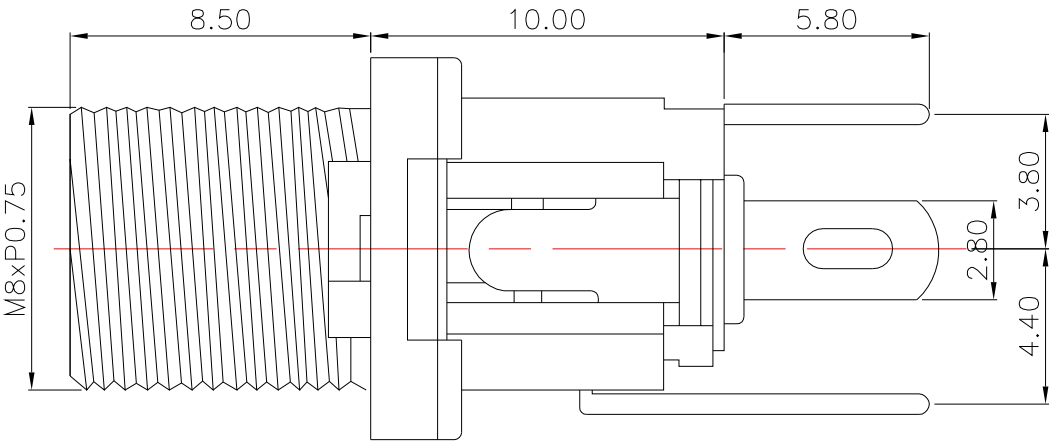


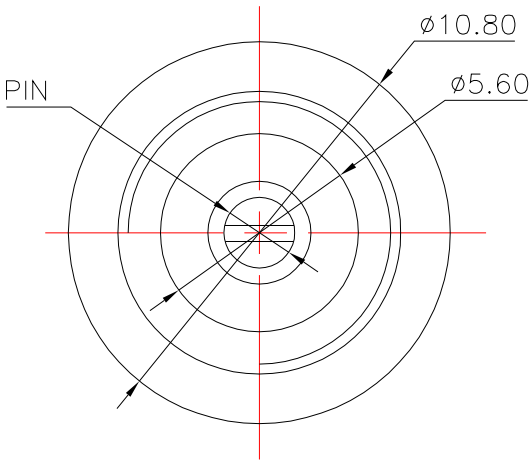

P.C.B LAYOUT(copper-sided view)

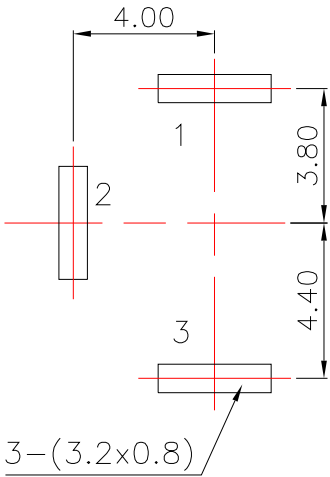

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20· ~70·
Operating force:3-20N
Operating Life:5,000cycles

Model No.	DC-025BM-A	DC-025BM-B
Schematic		

Model No.	1	2	3
PIN	φ2.0	φ2.35	φ2.5

②	Terminal	_____	3	Phosphor bronze	Au Plating	_____
①	Housing	_____	1	Nylon	Black	_____
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN						
CHECKED				TITLE:		
APPROVALS				PART NO.		
TOLERANCES ARE		30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15			
		~ 5	±0.10			
		±2'		DRAWING NO.	_____	PROJ: 
						SHEET 1 OF 1

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.