
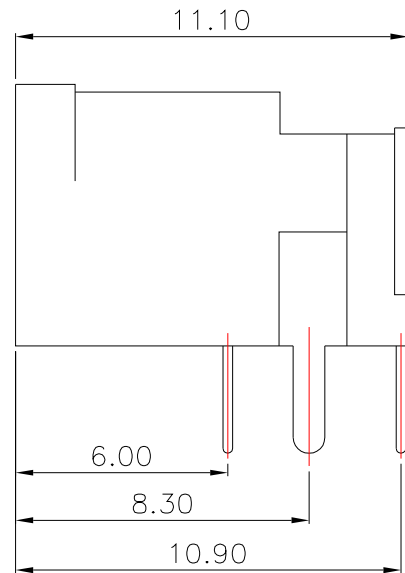
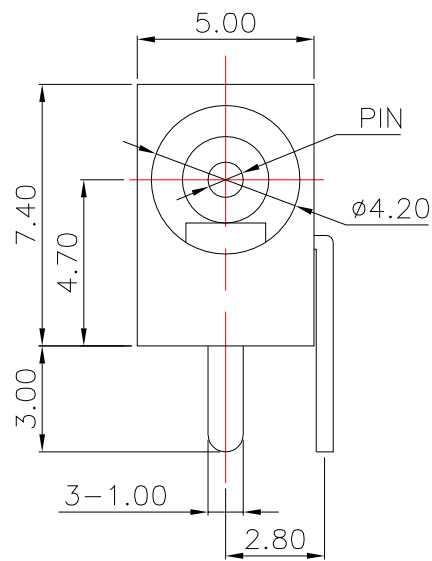
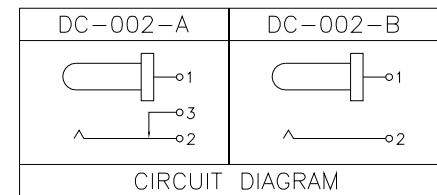


P.C.B LAYOUT(Copper-side view)

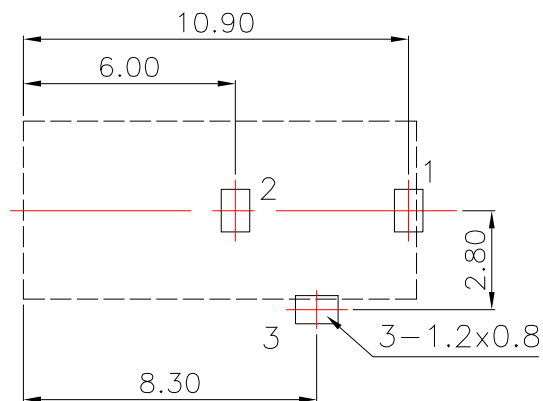

Model No.	1	2	3	4
PIN	ø0.65	ø1.0	ø1.3	ø1.65
DC PLUG O.D.	ø2.35	ø3.5	ø3.5	ø4.0

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20. ~70.
Operating force:3~20N
Operating Life:5,000cycles

②	Terminal	——	3	Phosphor bronze	Ac Plating	——
①	Housing	——	1	Nylon	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE			
DRAWN						
CHECKED				TITLE:		
APPROVALS				PART NO.		
TOLERANCES ARE	30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
	10~30	±0.20				
	5~10	±0.15				
	~ 5	±0.10				
		±2'	DRAWING NO.	——	SHEET 1 OF 1	

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.