
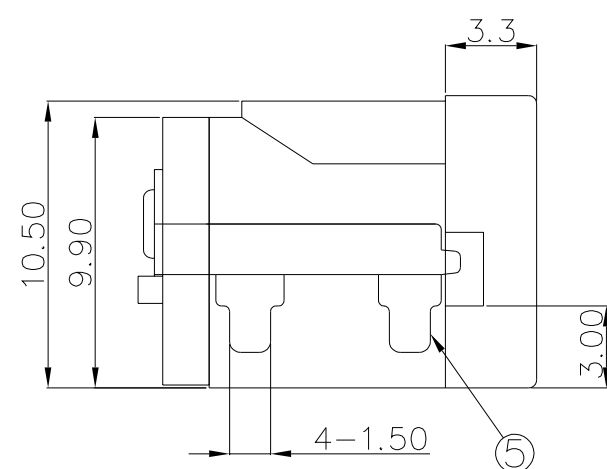
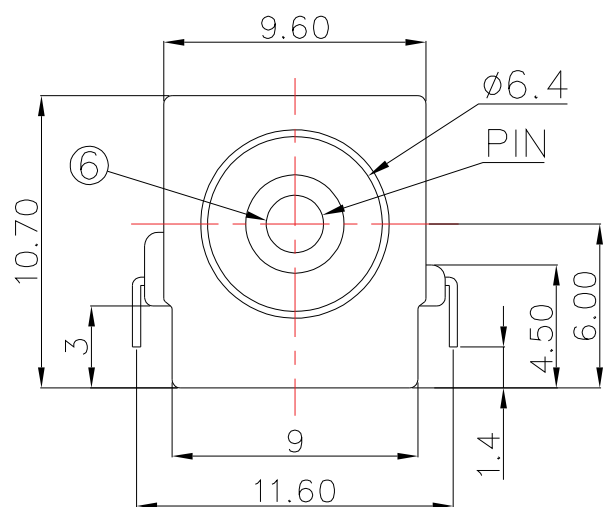
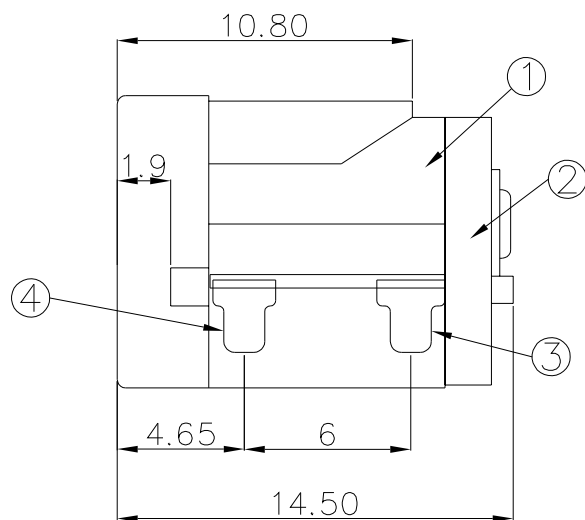
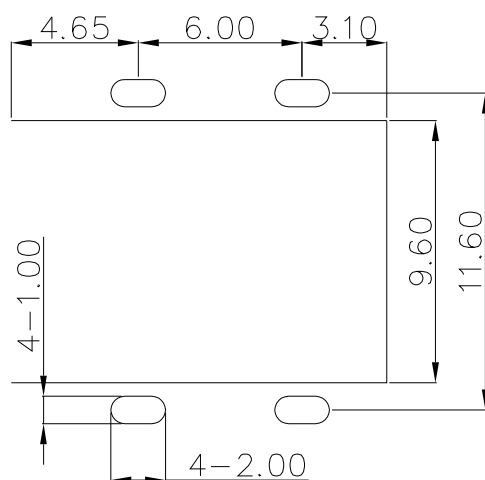


CIRCUIT DIAGRAM

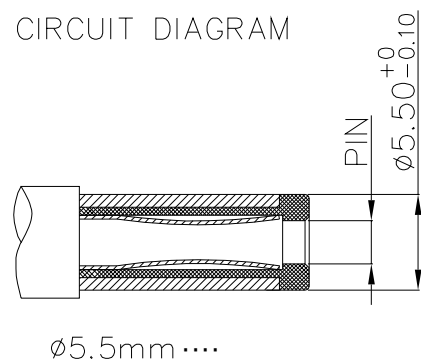

P.C.B LAYOUT

NOTE:
1.Rating: DC 30V 2A
2.Contact Resistance: ≤30mΩ
3.Insulation resistance: · 100MΩ
4.Voltage resistance: AC500V(50Hz)1min
5.Operating temperature: -30· ~70·
6.Operating force: 3-30N
7.Operating Life: 5,000cycles

PART NO.	PIN
DC-050C-20	φ2.0
DC-050C-25	φ2.5

⑥	PIN	—	1	Brass	Copper Tin	—
⑤	cover feet	—	1	Brass	Nickel Silver	—
④	Shrapnel	—	1	Phosphor bronze	Nickel Silver	—
③	Foot	—	1	Brass	Nickel Silver	—
②	cover	—	1	PA10T	Black	—
①	Base	—	1	PA10T	Black	—

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
------	-----------	---------	------	----------	-----------	--------

APPROVALS			DATE			
-----------	--	--	------	--	--	--

DRAWN						
-------	--	--	--	--	--	--

CHECKED				TITLE:		
---------	--	--	--	--------	--	--

APPROVALS				PART NO.		
-----------	--	--	--	----------	--	--

TOLERANCES ARE	30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10~30	±0.20				
	5~10	±0.15				
	~ 5	±0.10	±2'	DRAWING NO.		SHEET 1 OF 1

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.