

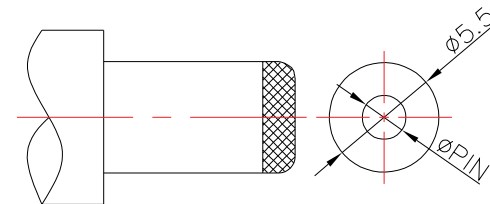
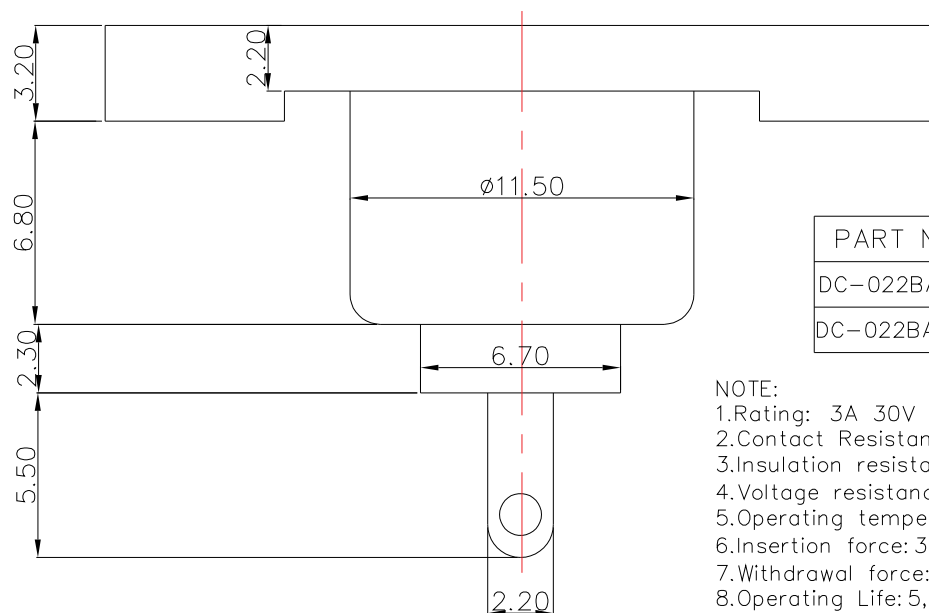
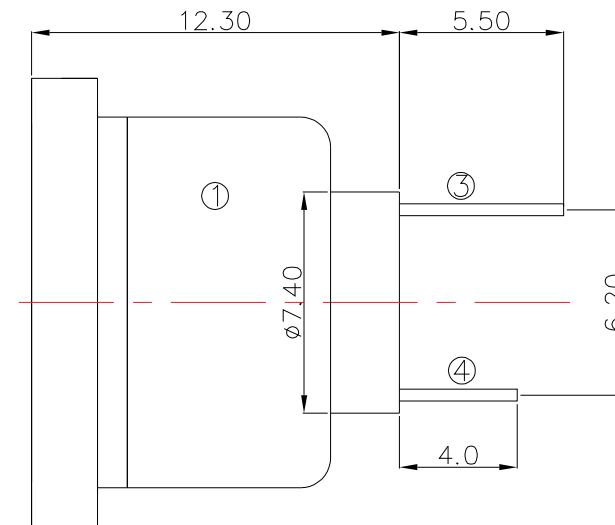


ROHS

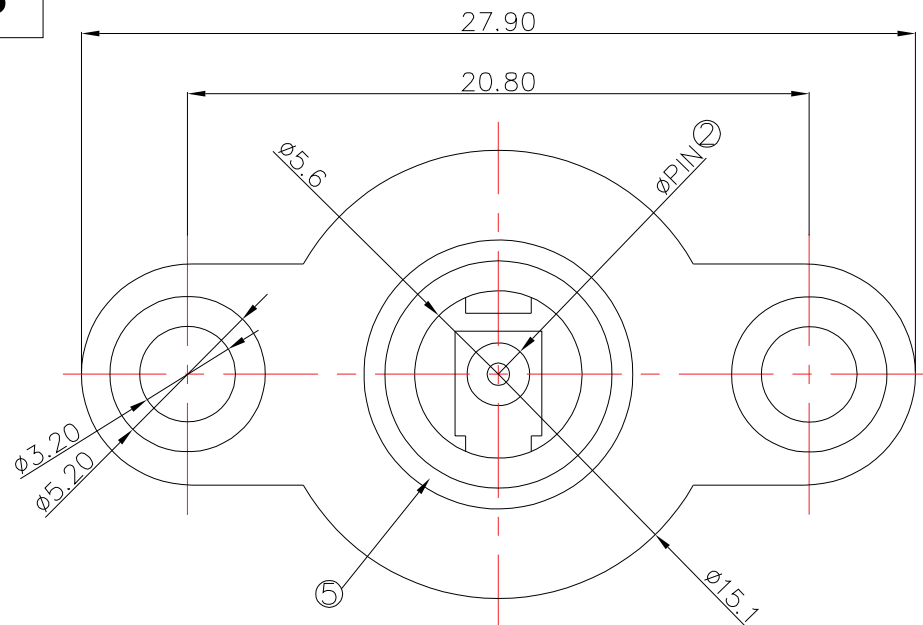

DC MATE PLUG

PART NO.	PIN
DC-022BA-01	2.0
DC-022BA-02	2.5

NOTE:
1.Rating: 3A 30V DC
2.Contact Resistance: $\leq 50\text{m}\Omega$
3.Insulation resistance: $\geq 100\text{M}\Omega$ DC 500V
4.Voltage resistance: AC500V/1min
5.Operating temperature: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$
6.Insertion force: $3 \sim 30\text{N}$ ($0.3 \sim 3.0\text{kgf}$)
7.Withdrawal force: $3 \sim 30\text{N}$ ($0.3 \sim 3.0\text{kgf}$)
8.Operating Life: 5,000cycles

5	Copper bushing	—	1	Brass	Copper Tin	—
4	Terminal2	—	1	Brass	Copper Tin	—
3	Terminal1	—	1	Brass	Copper Tin	—
2	PIN	—	1	Copper	Copper Tin	—
1	Base	—	1	PA46	Black/White	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE				
DRAWN							
CHECKED				TITLE:			
APPROVALS				PART NO.			
TOLERANCES ARE	30~ ..	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
	10~30	±0.20					
	5~10	±0.15					
	~ 5	±0.10					
DRAWING NO.					SHEET 1 OF		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			