
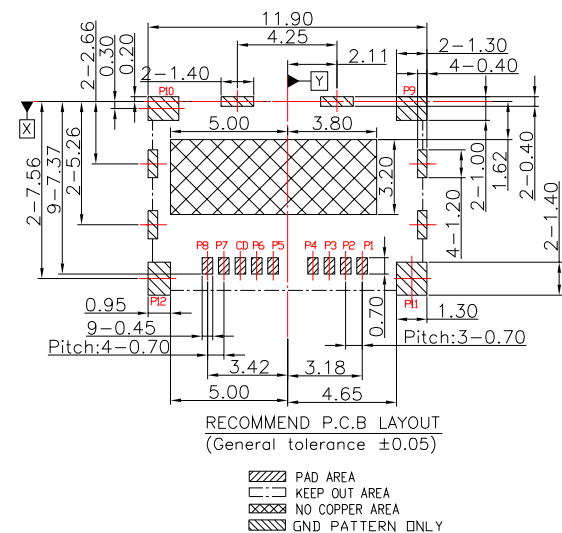


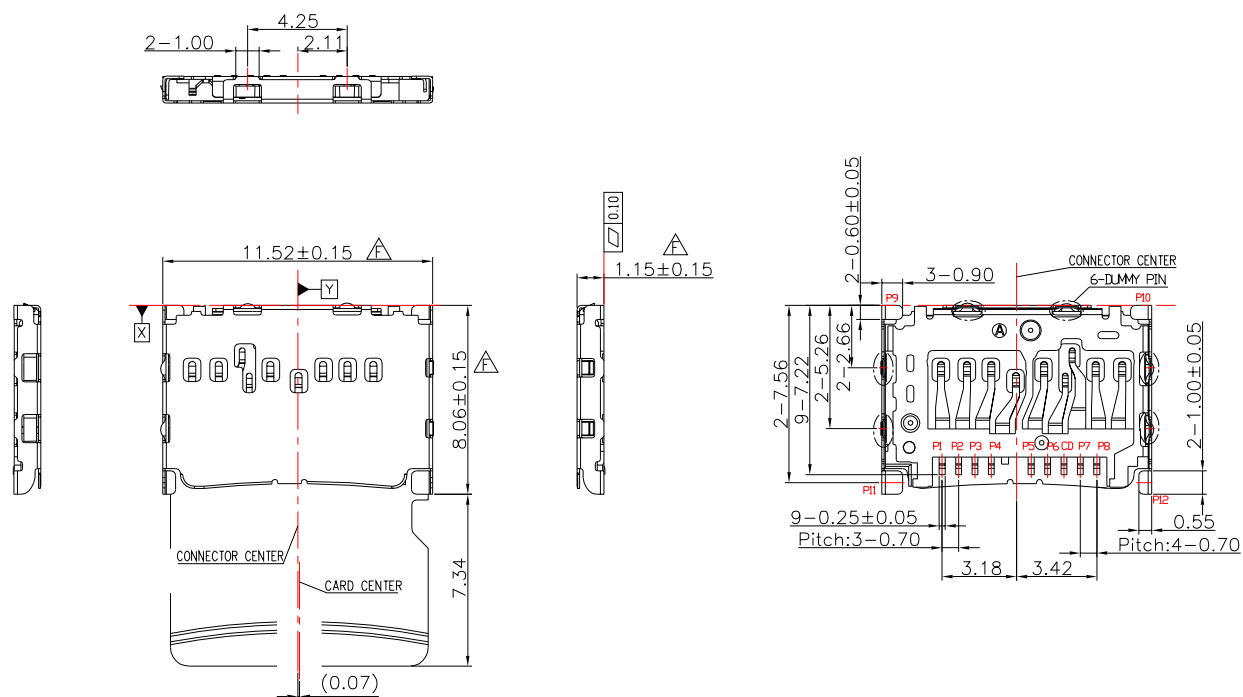

Specification

- 1 Current Rating :0.5A.
- 2 Voltage Rating :DC 5V
- 3 Ambient Temperature Range :-25°C~+85°C
- 4 Ambient Humidity Range :95% R.H. Max.
- 5 Contact Resistance:100mΩ max.
- 6 Insulation Resistance:1000MΩ min./500VDC
- 7 Durability:5,000 cycles

Pin Define	
P1	DAT2
P2	CD/DAT3
P3	CMD
P4	VDD
P5	CLK
P6	VSS
CD	CARD DETECT
P7	DAT0
P8	DAT1
P9-P12	GND

COMPOSITION OF DETECTION	
CARD DETECT(SW)	
P6	CD
CARD DETECTION/SWITCH	
CARD INSTALLATION:ON	
NON CARD:OFF	
WHEN BECOMIOG SW ON CARD INSTALLATION	

③	Shell	——	1	SUS	Au/Ni Plated	——		
②	Contact	——				——		
①	Housing	——	1		Black	——		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK		
APPROVALS		DATE						
DRAWN								
CHECKED							TITLE:	
APPROVALS							PART NO.	
TOLERANCES ARE	30~...	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 		
	10~30	±0.25						
	5~10	±0.20						
	~ 5	±0.15						
DRAWING NO.		±2'		SHEET 1 OF 1				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—