


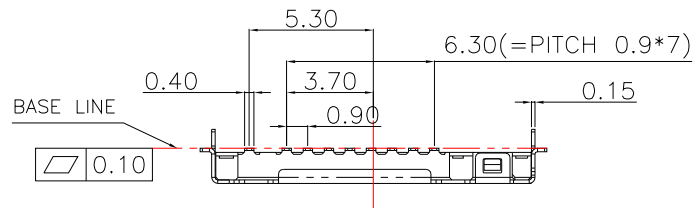
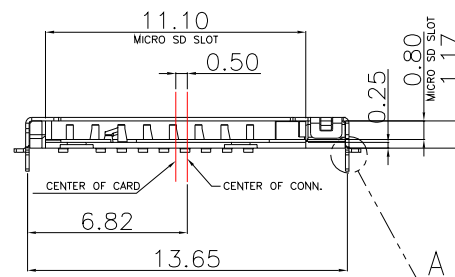



ROHS

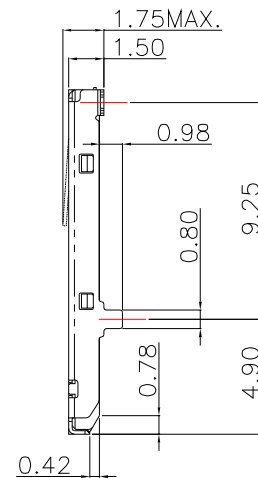

Detail A
Scale 5 : 1

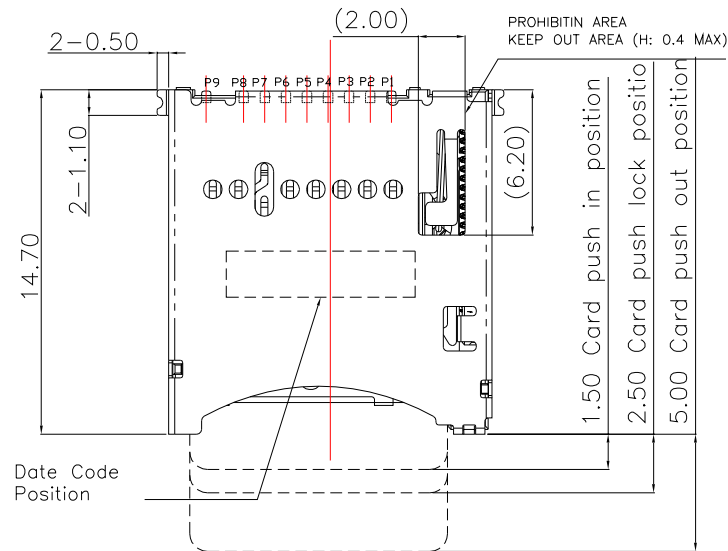

PIN NUMBER	PIN DEFINE
PIN 1	DAT2
PIN 2	CD/DAT3
PIN 3	CMD
PIN 4	VDD
PIN 5	CLK
PIN 6	VSS
PIN 7	DAT0
PIN 8	DAT1
PIN 9	CD

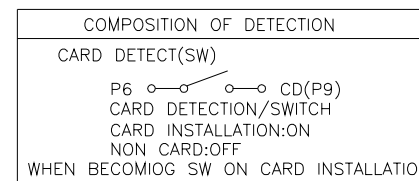

PCB PATTERN LAYOUT
(GENERAL TOLERANCE:±0.05)

Specification

- 1 Current Rating :0.5A.
- 2 Voltage Rating :DC 5V
- 3 Ambient Temperature Range :-25°C~+85°C
- 4 Ambient Humidity Range :95% R.H. Max.
- 5 Contact Resistance:100mΩ max.
- 6 Insulation Resistance:1000MΩ min./500VDC
- 7 Durability:10,000 cycles

②	Shell	——	1	SUS	Ni Plated	——	
②	Contact	——				——	
①	Housing	——	1		Black	——	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK	
APPROVALS		DATE					
DRAWN							
CHECKED				TITLE:			
APPROVALS				PART NO.			
D.	TOLERANCES ARE	30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.25				
		5~10	±0.20				
		~ 5	±0.15				
		±2'	DRAWING NO.	——	SHEET 1 OF 1		

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.