
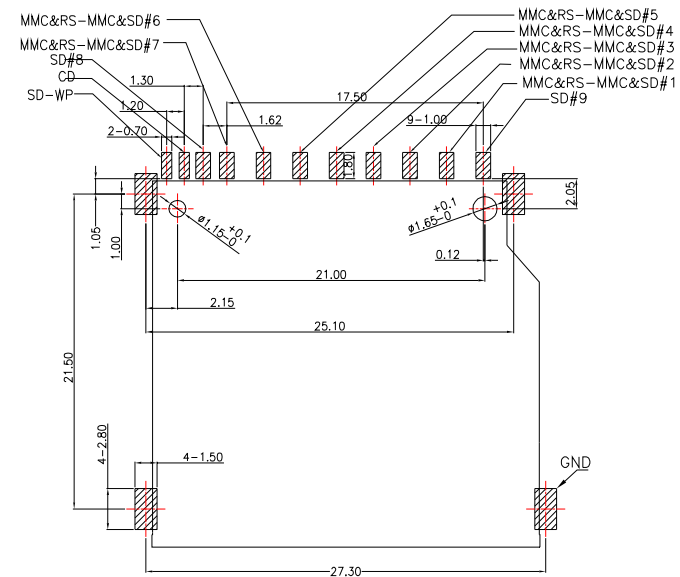
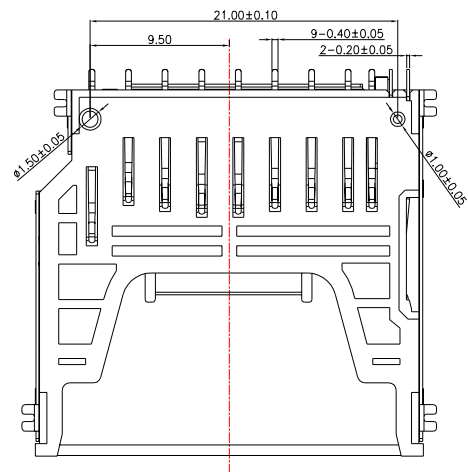


ROHS

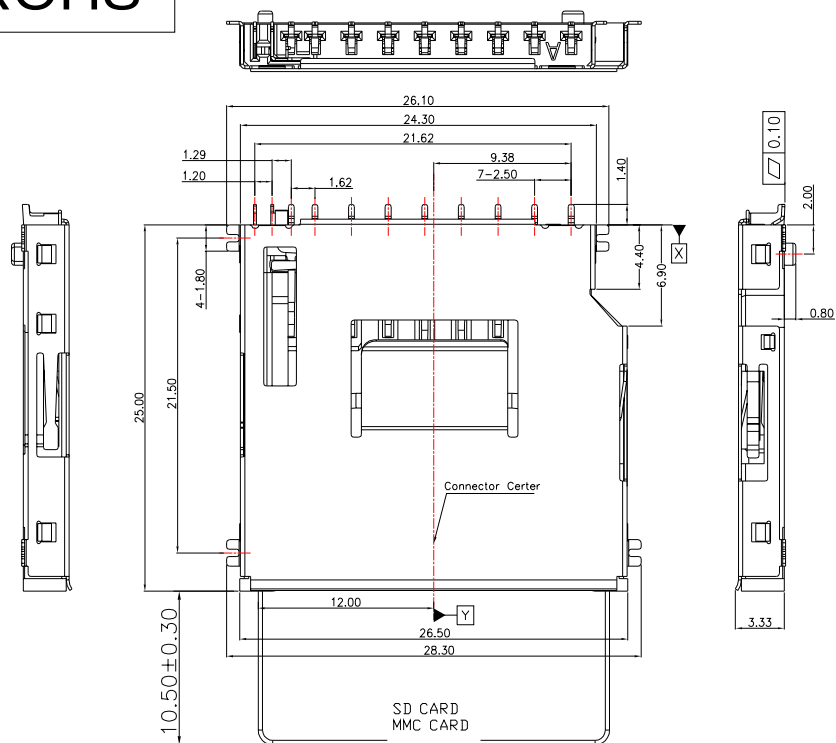


RECOMMENDED P.C.B LAYOUT
(General tolerance ±0.05)

PAD AREA
 KEEP OUT AREA

Specification

- 1 Current Rating :0.5A.
- 2 Voltage Rating :DC 5V
- 3 Ambient Temperature Range :-25°C~+85°C
- 4 Ambient Humidity Range :95% R.H. Max.
- 5 Contact Resistance:100mΩ max.
- 6 Insulation Resistance:1000MΩ min./500VDC
- 7 Durability:10,000 cycles

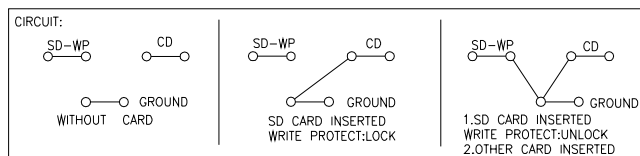

PIN NO.	MEMORY CARD PIN NO.
MMC&RS-MMC&SD#1	MMC&RS-MMC/SD-1 (CD/DAT3)
MMC&RS-MMC&SD#2	MMC&RS-MMC/SD-2 (CMD)
MMC&RS-MMC&SD#3	MMC&RS-MMC/SD-3 (VSS1)
MMC&RS-MMC&SD#4	MMC&RS-MMC/SD-4 (VDD)
MMC&RS-MMC&SD#5	MMC&RS-MMC/SD-5 (CLK)
MMC&RS-MMC&SD#6	MMC&RS-MMC/SD-6 (VSS2)
MMC&RS-MMC&SD#7	MMC&RS-MMC/SD-7 (DAT0)
SD#8	SD-8 (DAT1)
SD#9	SD-9 (DAT2)

③	Shell	—	1	SUS	Ni Plated	—
②	Terminal	—		—	—	—
①	Housing	—	1	—	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE			
DRAWN						
CHECKED					TITLE:	
APPROVALS					PART NO.	
TOLERANCES ARE	30~100	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10~30	±0.25				
	5~10	±0.20	±2'	DRAWING NO.		SHEET 1 OF 1
	~ 5	±0.15				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			