

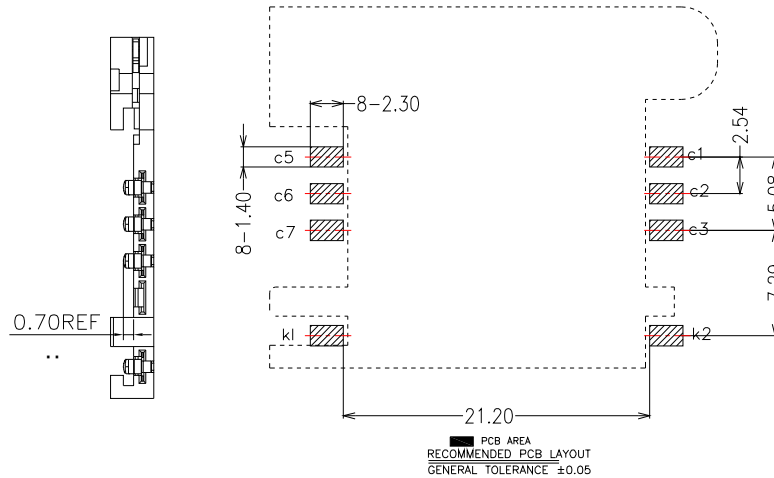


ROHS

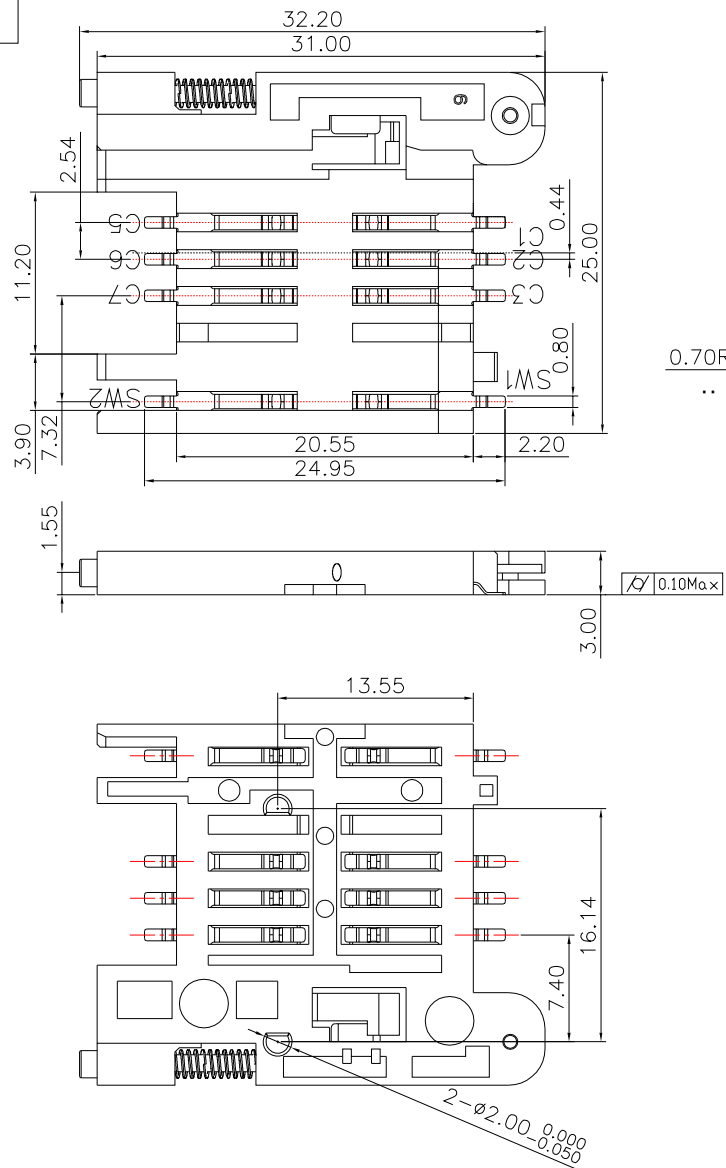

PIN NO.	PIN NAME
C2	Supply Voltage Vcc
C3	Reset (RST)
C4	Clock (CLK)
C5	N/A
C6	Ground
C7	Programming Voltage Vpp
C8	I/O

SW1	SW2	SW1	SW2
WITHOUT CARD	SIM INSERTED		

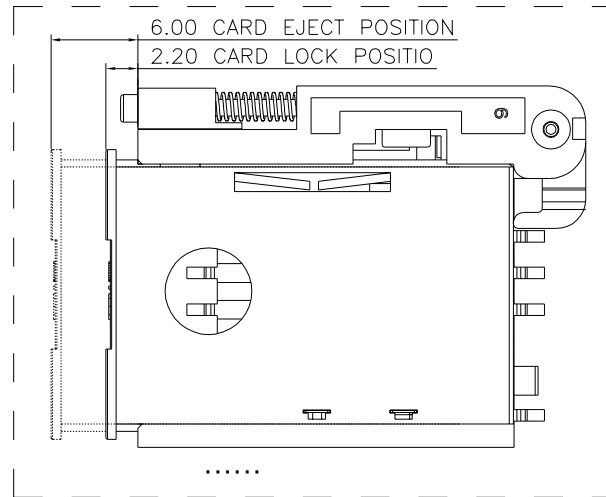

Specification:

- 1.Current rating: 0.5 A
- 2.Voltage rating: DC 5V
- 3.Dielectric strength:500V AC RMS for 1 minute.
- 4.Contact resistance:100m Ω max.
- 5.Insulator resistance:500M Ω min.at 250V DC.
- 6.Mating unmating cycles:5000 cycles

③	Cap	—	1	PA9T	Yellow	—
②	Terminal	—	7			—
①	Housing	—	1		Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE			
DRAWN						
CHECKED					TITLE:	
APPROVALS					PART NO.	
TOLERANCES ARE			30~ 10~30 5~10 ~ 5	± 0.30 ± 0.25 ± 0.20 ± 0.15	ANGLE	UNIT: mm
				$\pm 2'$	SCALE: 1:1	PROJ:
			DRAWING NO.			SHEET 1 OF 1

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.