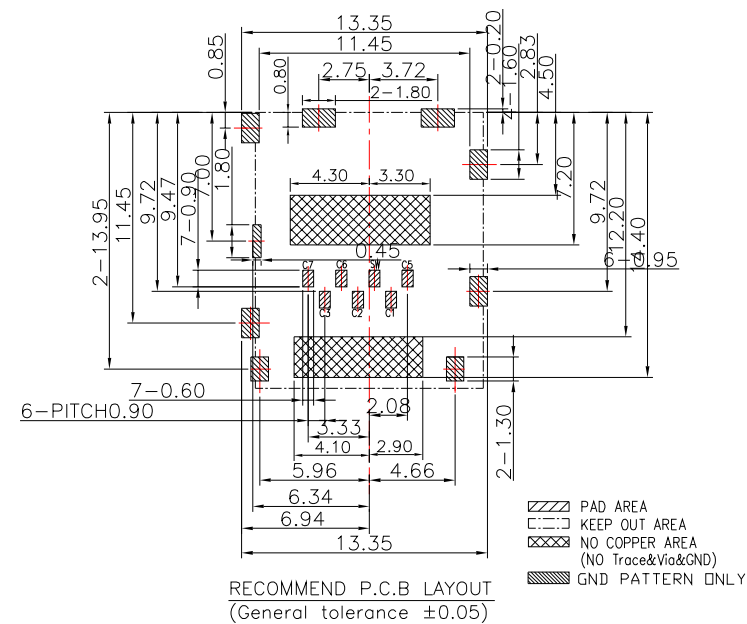
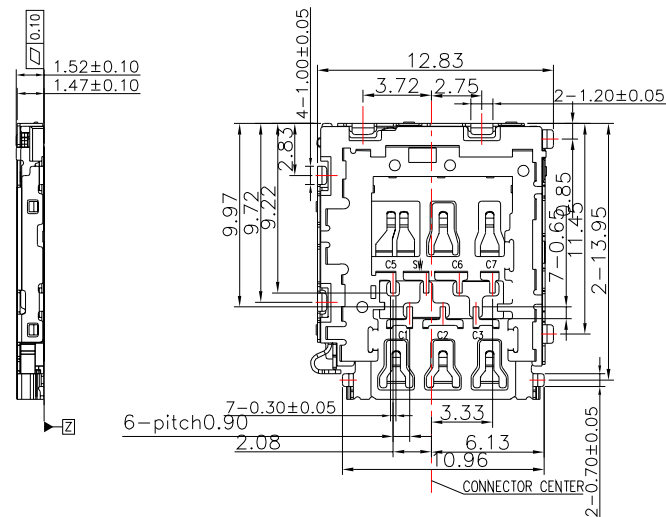
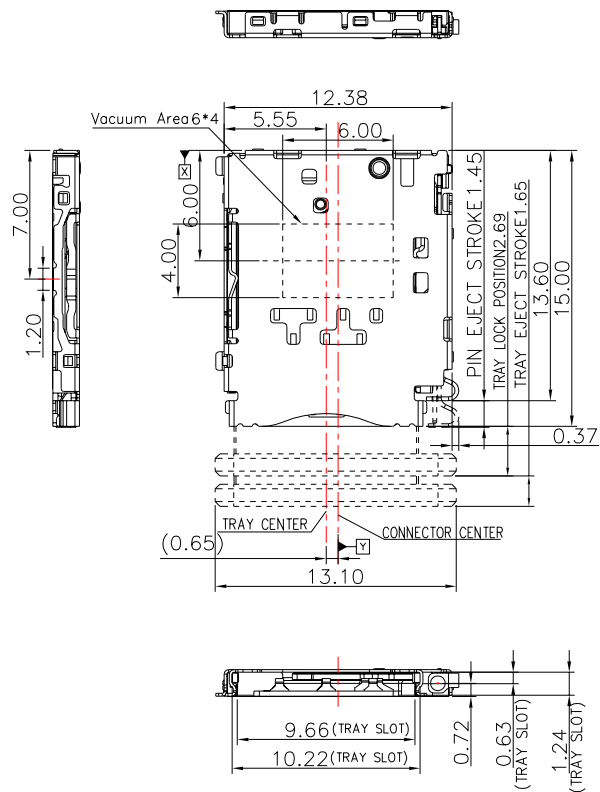


SIM Card Pin Assignments

NANO	SIM	CARD
C1		Vcc
C2		RST
C3		CLK
C5		GND
SW		CD/SW
C6		Vpp
C7		DATA

Specification:

- 1.Current rating: 0.5 A
- 2.Voltage rating: DC 5V
- 3.Dielectric strength:500V AC RMS for 1 minute.
- 4.Contact resistance:100mΩ max.
- 5.Insulator resistance:500MΩ min.at 250V DC.
- 6.Mating unmating cycles:5000 cycles

③	Shell	—	1	SUS	Ni/Au Plated	—
②	Terminal	—	7			—
①	Housing	—	1		Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS				DATE			
DRAWN							
CHECKED				TITLE:			
APPROVALS				PART NO.			
D.	TOLERANCES ARE	30~...	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.25				
		5~10	±0.20				
		~ 5	±0.15				
			±2'	DRAWING NO.	_____	SHEET 1 OF	

							CHECKED				TITLE:		
							APPROVALS				PART NO.		
	A		NEW				TOLERANCES ARE	30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
						10~30		±0.25					
						5~10		±0.20					
						~ 5		±0.15					
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.				±2'	DRAWING NO.		SHEET 1 OF