
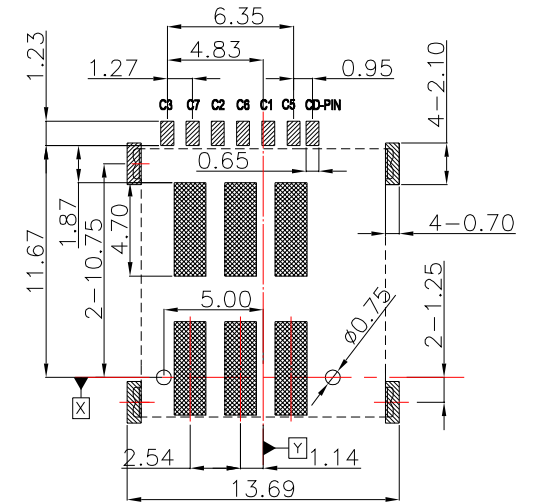
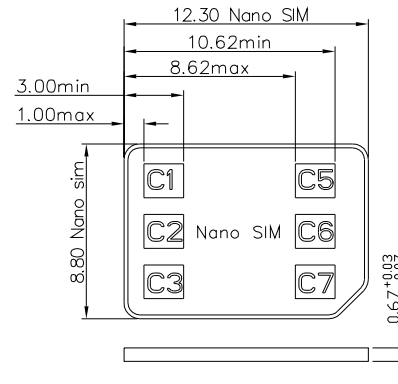
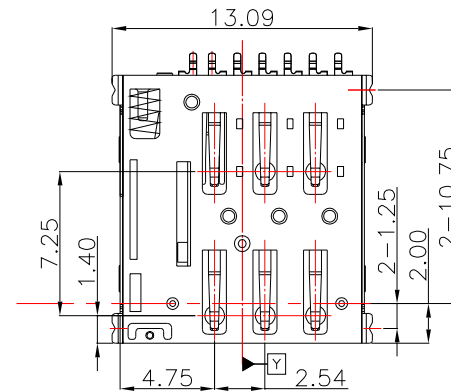


ROHS

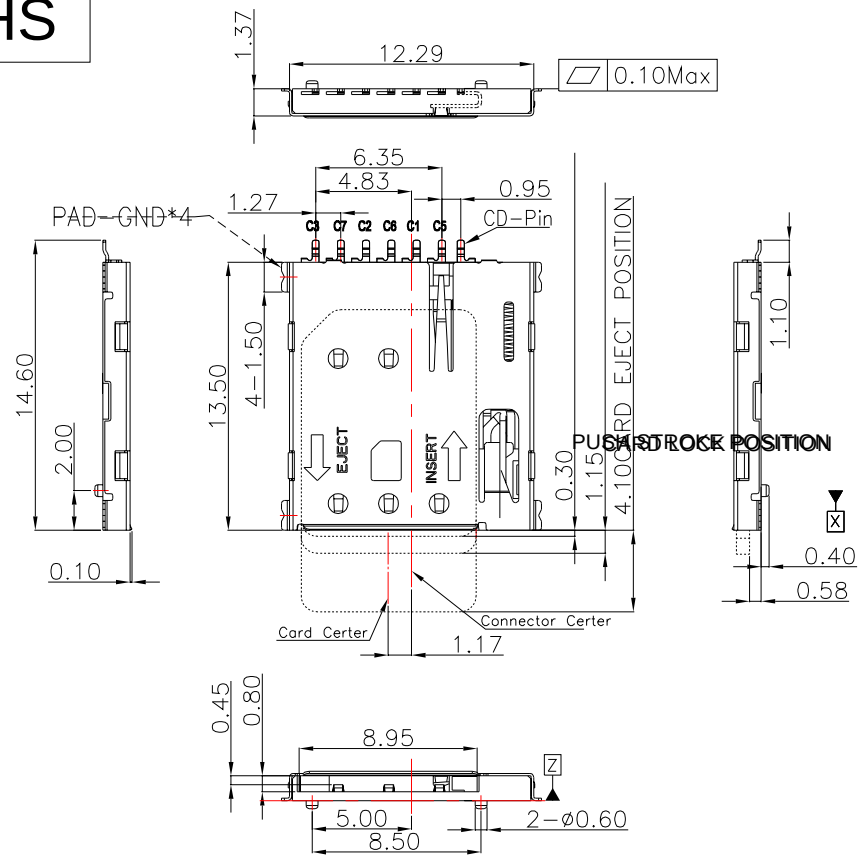

▨ PAD AREA

▤ KEEP OUT AREA

▩ GND PATTERN ONLY

▦ NO COPPER AREA
(NO Trace&Via&GND)


RECOMMENDED PCB LAYOUT

GENERAL TOLERANCE ±0.05

Specification:

- 1.Current rating: 0.5 A
- 2.Voltage rating: DC 5V
- 3.Dielectric strength:500V AC RMS for 1 minute.
- 4.Contact resistance:100mΩ max.
- 5.Insulator resistance:500MΩ min.at 250V DC.
- 6.Mating unmating cycles:3000 cycles

SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

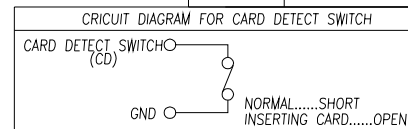

③	Shell	—	1	SUS	Ni Plated	—
②	Terminal	—	6	—	—	—
①	Housing	—	1	—	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE			
DRAWN						
CHECKED					TITLE:	
APPROVALS					PART NO.	
TOLERANCES ARE	30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10~30	±0.25				
	5~10	±0.20				
	~ 5	±0.15				
			±2'	DRAWING NO.		SHEET 1 OF 1

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.