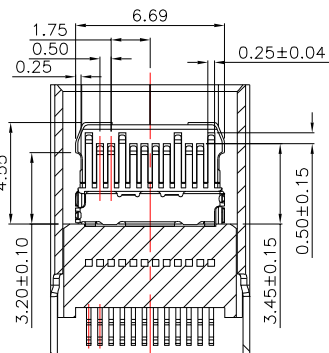
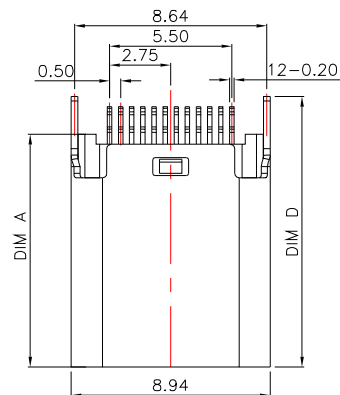

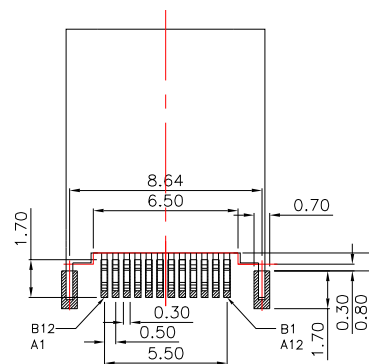
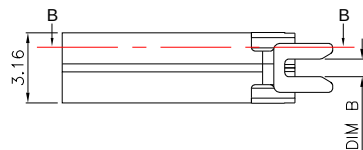



SECTION B-B
SCALE 1:1



PART NO	DIM B	DIM A	DIM C	DIM D
TYPE-C-31-M-21	1.0	10.5	6.25	12.15
TYPE-C-31-M-21A	0.8			
TYPE-C-31-M-21B	1.2			
TYPE-C-31-M-20	1.0	9.3	5.10	11.05
TYPE-C-31-M-20A	0.8			
TYPE-C-31-M-20B	1.2			

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

SECTION A-A
SCALE 1:1

	A		B
1	GND	12	GND
2	TX1+	11	RX1+
3	TX1-	10	RX1-
4	VBUS	9	VBUS
5	CC1	8	SBU2
6	D+	7	D-
7	D-	6	D+
8	SBU1	5	CC2
9	VBUS	4	VBUS
10	RX2-	3	TX2-
11	RX2+	2	TX2+
12	GND	1	GND

③	Shell	—	1	SUS	Ni Plated
②	Contact	—	2		
①	Housing	—	1		
ITEM	PART NAME	TER'NO.	QTY.	Γ	

APPROVALS			DATE				
DRAWN							
CHECKED					TITLE:		
APPROVALS					PART NO.		
TOLERANCES ARE	30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
	10~30	±0.25					
	5~10	±0.20					
	~ 5	±0.15					
			±2"	DRAWING NO.	_____	SHEET 1 OF	

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.