


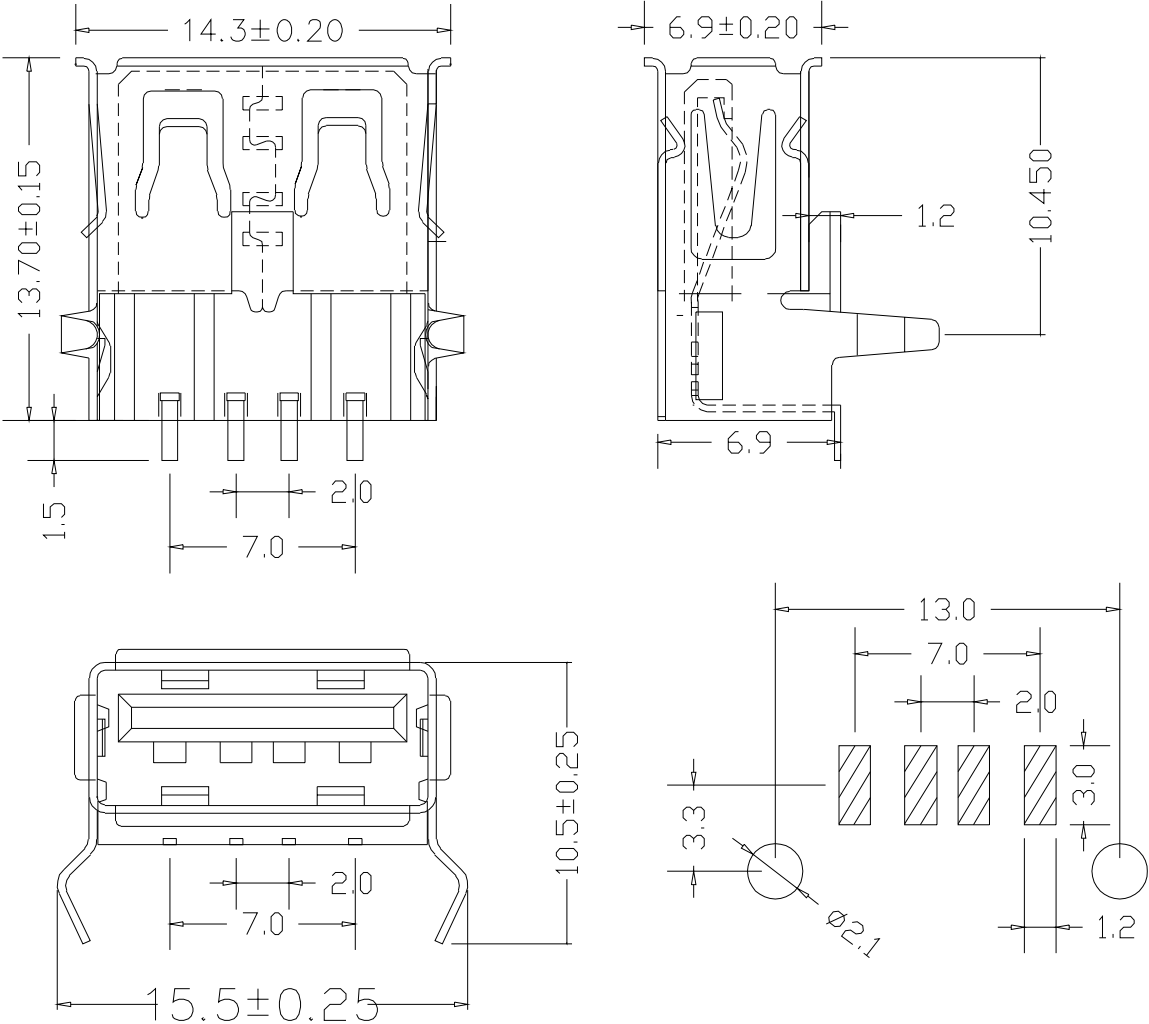

规格说明:Specifications:

电气特性:Electrical:

- 1. 额定电流: Current Rating
1.5A/contact terminal
- 2. 额定电压: Voltage Rating
30V DC
- 3. 接触阻抗: Contact Resistance
30 milliohms MAX
- 4. 耐电压: Dielectric Withstanding Voitage:
500 V AC AT Sea Level
- 5. 绝缘阻抗: Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf<MAX>
Unmate force:1.02kgf<MIN>
- 2. 端子保持力: Terminal Retenion
1.0kgf<MIN>

原材料:Material:

- 1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
- 2. 端子:Contact:Copper Alloy C2680
- 3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

- 1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- 端子四周镀50U" <MIN> 锡, 镀金区域镀100-200U" 镀金1U"
- 2. 外壳:Shell:
铜壳四周镀80U" <MIN> 铜

							APPROVALS		DATE									
							DRAWN											
														CHECKED			TITLE:	
														APPROVALS			PART NO.	
	A		NEW				TOLERANCES ARE	30~100	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 					
						10~30		±0.25										
						5~10		±0.20										
						~ 5		±0.15										
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.		±2'		DRAWING NO.		SHEET 1 OF 1						