


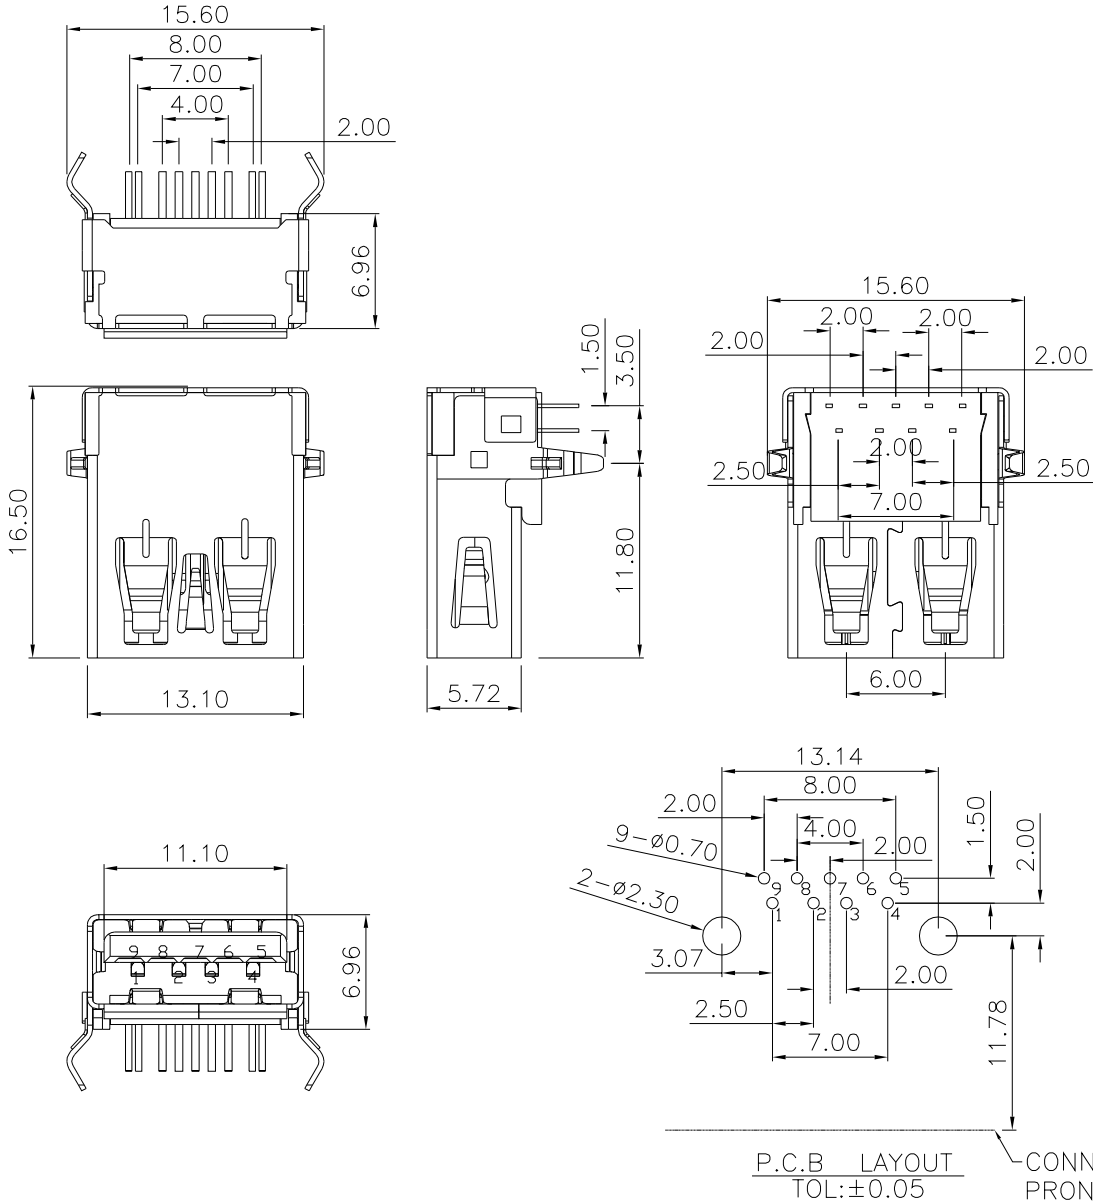

电气特性:Electrical:

- 1.额定电流: Current Rating
1.5A/contact terminal
- 2.额定电压: Voltage Rating
30V DC
- 3.接触阻抗:Contact Resistance
30 milliohms MAX
- 4.耐电压:Dielectnc Withstanding Voitage:
500 V AC AT Sea Level
- 5.绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 1.插拔力: Cnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)

原材料:Matarial:

- 1.塑胶:Housing:
Hing Temperature Tthermaplastics,

- 2.端子>Contact:Copper Alloy C2680
- 3.外壳:Shell: Copper Alloy C2680/SPCC

1.端子>Contact: Plated Gold in Mating Area;
电镀:Finish: Tin On Solder Talls

端子四周镀60U”(MIN)—100U锡,”镀金1U”

- 2.外壳:Shell:
外壳四周镀60U”(MIN)镍 Nickel Plating

PIN NUMBER	1	2	3	4	5	6	7	8	9	SHELL
SIGNAL NAME	VBUS	D-	D+	GND	SSRX-	SSRX+	GND	SSTX-	SSRT+	SHIELD

APPROVALS		DATE				
DRAWN						
CHECKED				TITLE:		
APPROVALS				PART NO.		
TOLERANCES ARE	30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10~30	±0.25				
	5~10	±0.20	±2'	DRAWING NO.		SHEET 1 OF 1
	~ 5	±0.15				

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.