
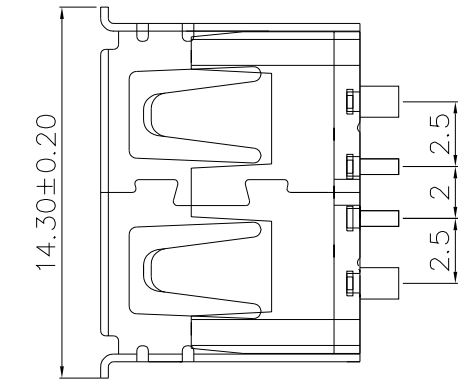
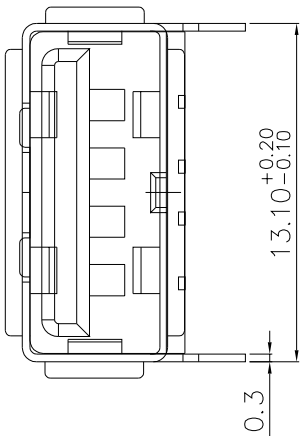
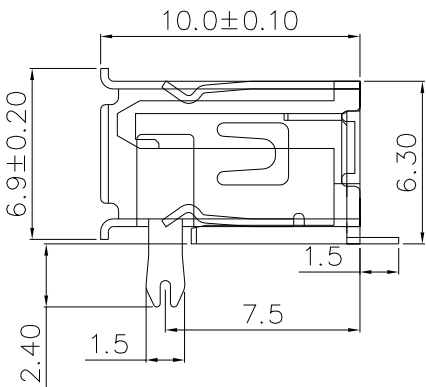


ROHS

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	GND

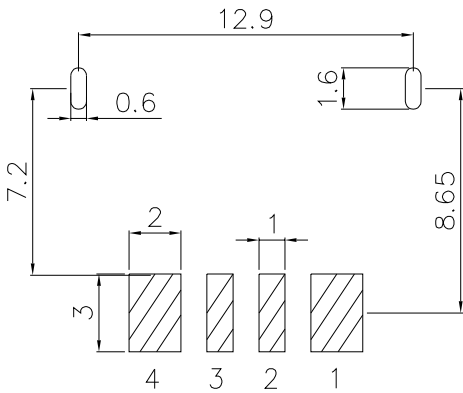

Electrical:
Current Rating
3.1A/contact terminal
Voltage Rating
30V DC
Contact Resistance
30 milliohms MAX
Dielectric Withstanding Voltage:
500 V AC AT Sea Level
Insulation Resistance:
1000MEGA ohms MIN
Mechanical:
Connector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
Terminal Retention
1.0kgf(MIN)

Material:
Housing:
Housing Temperature Thermoplastics,
Contact:Copper Alloy C2680
Shell: Copper Alloy C2680/SPCC
Finish:
Contact: Plated Gold in Mating Area;
Tin On Solder Tails
Plated Tin 50U”(MIN)• Plated Gold 1U
Shell:
Plated Tin 80U”(MIN)
Nickel Plating

							APPROVALS		DATE				
							DRAWN						
							APPROVALS				PART NO.		
_____	A	_____	NEW	_____	_____	_____	TOLERANCES ARE	30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
						10~30		±0.20					
						5~10		±0.15					
						~ 5		±0.10					
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.		±2°		DRAWING NO.	_____	SHEET 1 OF 1	