

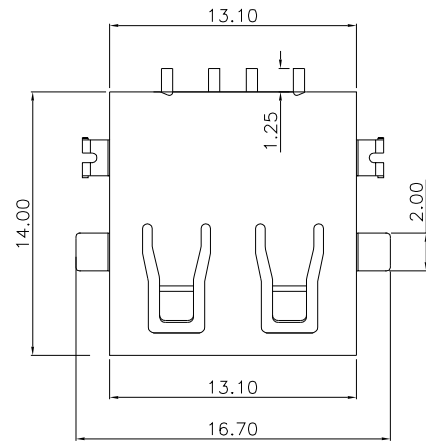
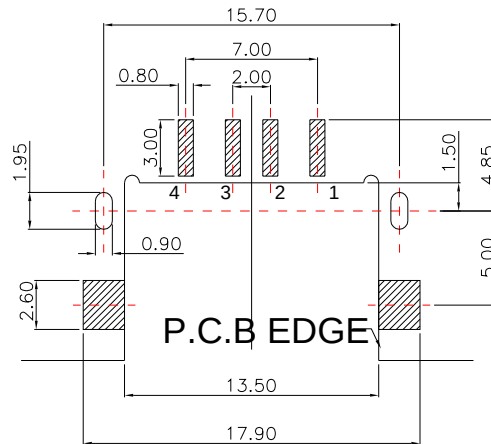
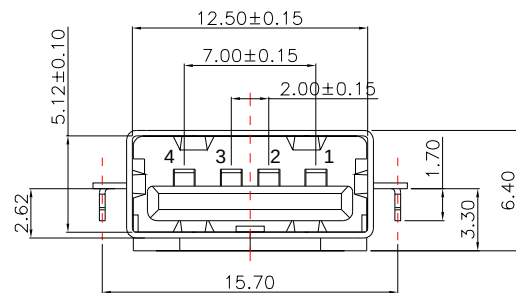
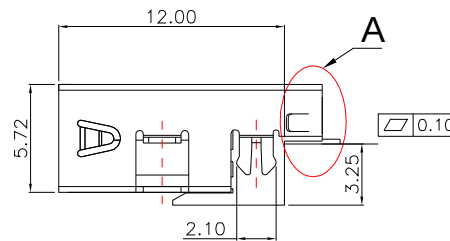


ROHS

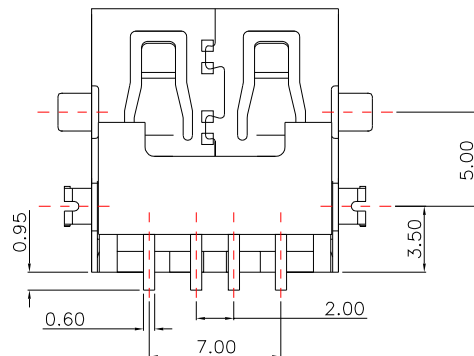

P.C.B LAYOUT



Pin Number	Signal Name
1	VCC
2	D-
3	D+
4	GND

- 1.Current Rating
1.5A/contact terminal
- 2.Voltage Rating
30V DC
- 3.Contact Resistance
30 milliohms MAX
- 4.Dielectnic Withstanding Voitage:
500 V AC AT Sea Level
- 5.Lnsulation Resistance:
1000MEGA ohms MIN
- 6.Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 7.Terminal Retenion
1.0kgf(MIN)

PART NO	..
U-A-24SD-W-2	..
U-A-24SD-W-2T	..

③	Base	—	1	PBT	black
②	Terminal	—	∠	p	
①	Housing	—	1	n	
ITEM	PART NAME	TER'NO.	QTY.	Γ	

APPROVALS			DATE				
DRAWN							
CHECKED					TITLE:		
APPROVALS					PART NO.		
TOLERANCES ARE	30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
	10~30	±0.25					
	5~10	±0.20					
	~ 5	±0.15					
			±2°	DRAWING NO.	_____	SHEET 1 OF 1	

_____	A	_____	NEW	_____	_____
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	APPRO.