
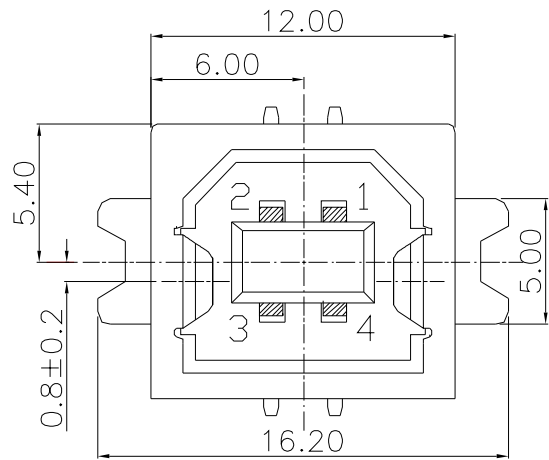
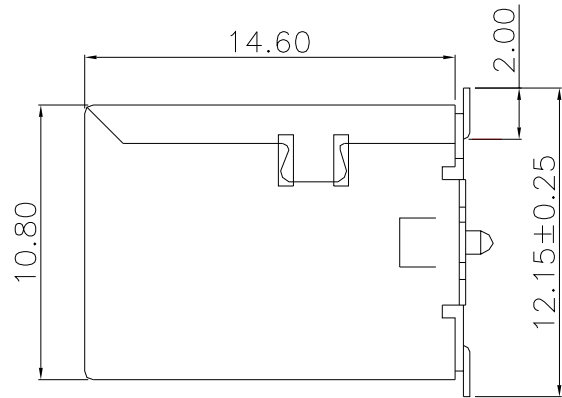
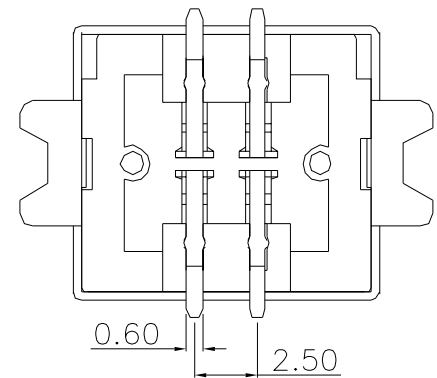
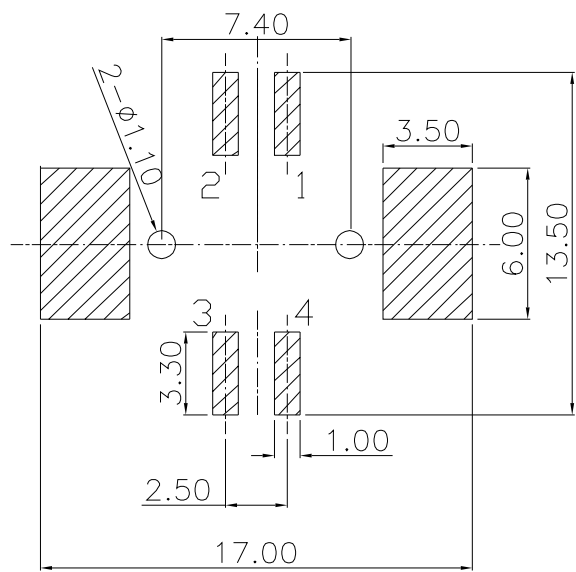


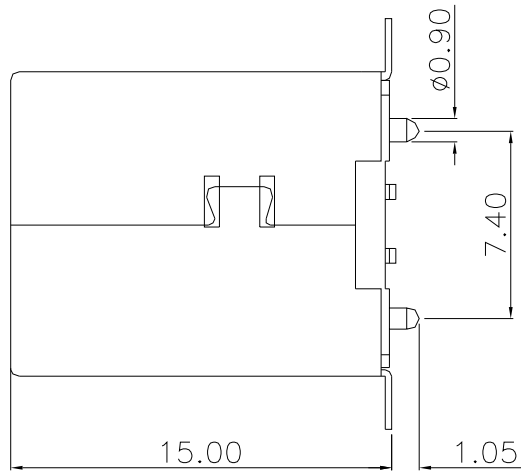

Specification:
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min. At 500VDC.
Rated Voltage And Current: 1.5A At 250VAC Minimum.
Dielectric Withstanding Voltage:
750V AC (rms) for 1 Minute(Rev. 1.1)
Durability (Life Test): 1500 Cycles
Insertion Force: 35 Newton Maximum.
Extraction Force: 10 Newton Minimum.

③	Base	—	1	PA9T	White/black
②	Terminal	—	2	p	
①	Housing	—	1		
ITEM	PART NAME	TER'NO.	QTY.	Γ	
APPROVALS			DATE		
DRAWN					
CHECKED				TITLE:	
APPROVALS				PART NO.	
TOLERANCES ARE	30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
	10~30	±0.25			
	5~10	±0.20			
	~ 5	±0.15			
			±2'	DRAWING NO.	
				PROJ:	
				SHEET	1 OF 1

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.