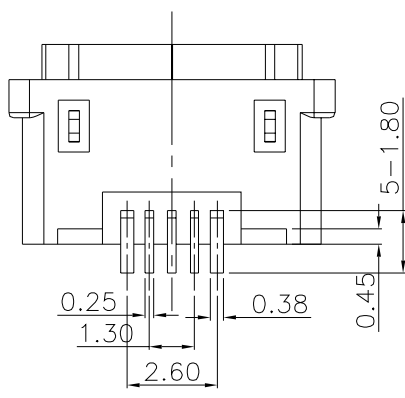
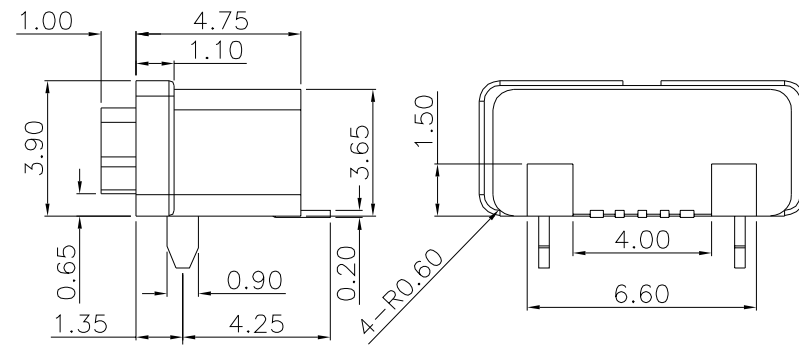
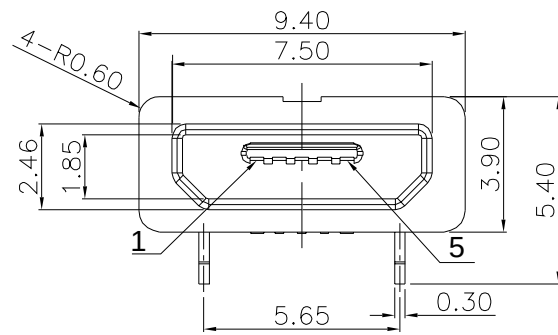
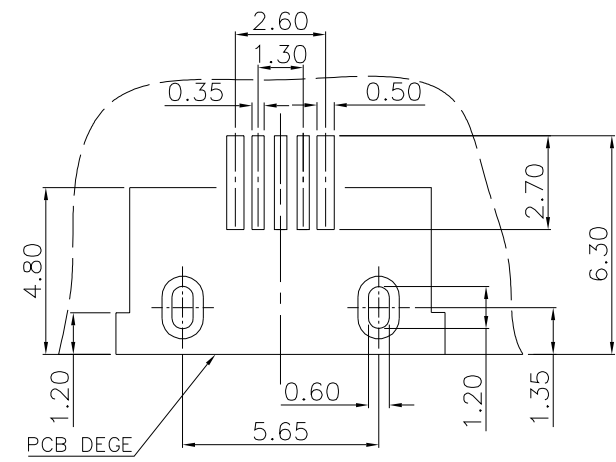
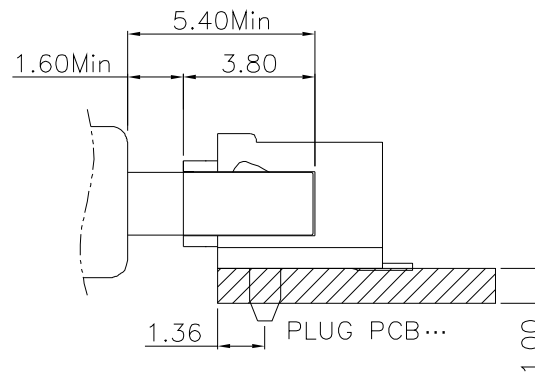
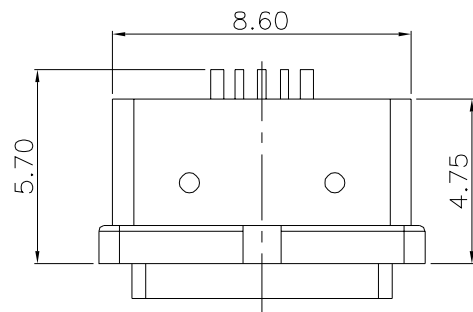


P.C.B LAYOUT

- Specifications
- 1. Rating : AC\DC 30V 1.0A
 - 2. Dielectric withstanding:250V(AC) for 1min
 - 3. Contact Resistance : 30mΩMax
 - 4. Insulation Resistance: 500MΩ Min
 - 5. Operating Temperature Range: - 20-- 85
 - 6. Operating Life : 5,000Cycles
 - 7. IP Rating: IPX6

PART NO.	
U-E-M5DW-W-1	U-E-M5DW-W-2

Contact Number	Signal Name	Remarks
1	VBUS	Power
2	D-	Date-
3	D+	Date+
4	ID	Reserve or Gound
5	GND	Gound

③	Shell	——	1	SUS	Ni Plated	——	
②	Contact	——	5			——	
①	Housing	——	1		Black	——	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK	
APPROVALS			DATE				
DRAWN							
CHECKED			TITLE:				
APPROVALS			PART NO.				
TOLERANCES ARE		30~	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.25				
		5~10	±0.20				
		~ 5	+0.15				
		±2"	DRAWING NO.	——	SHEET 1 OF 1		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			