



ROHS


Waterproof Rating: IPX7

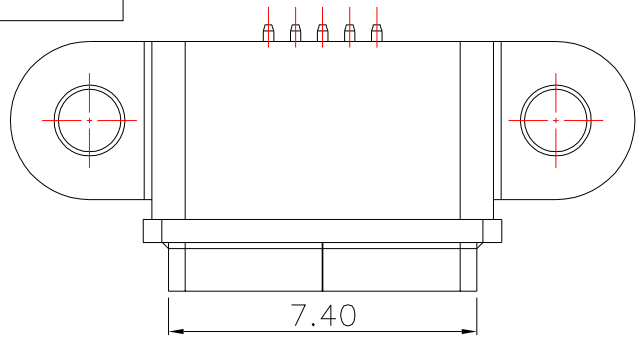

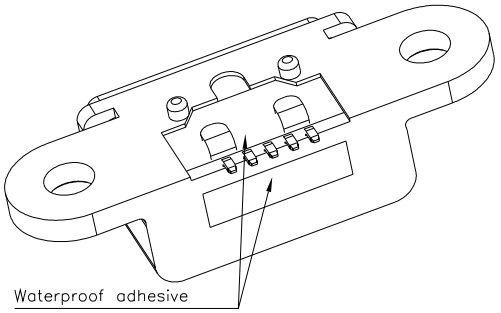


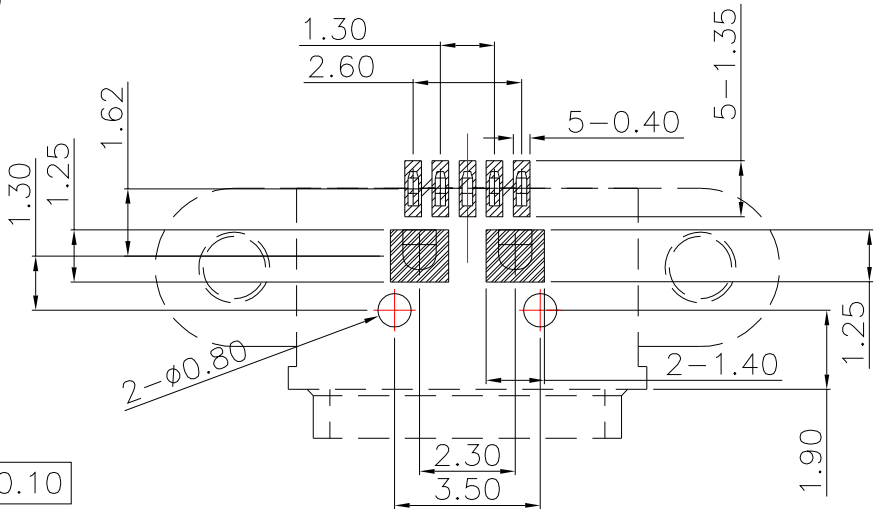


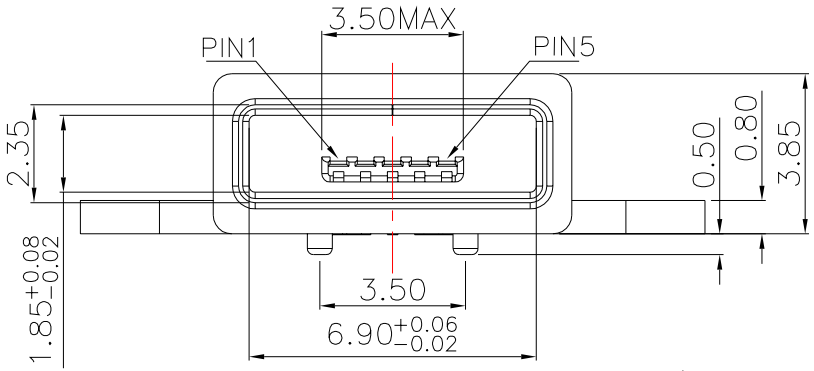


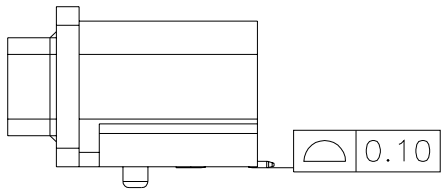

PCB LAYOUT

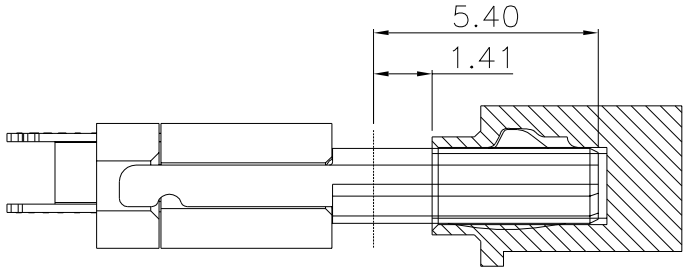

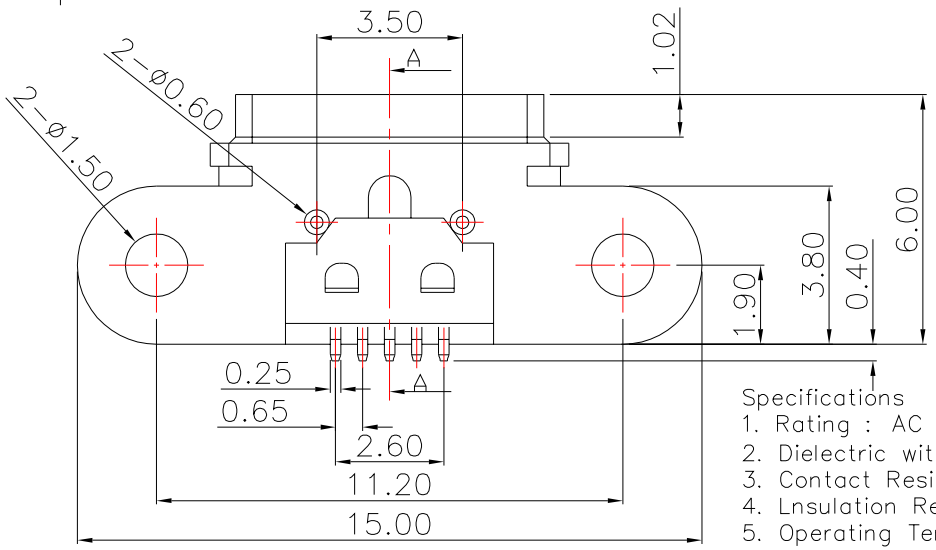

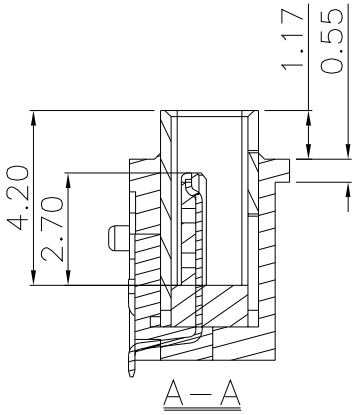

Specifications

1. Rating : AC 30V 1.0A
2. Dielectric withstanding: 100V(AC) for 1min
3. Contact Resistance : 50mΩMax
4. Lnsulation Resistance: 100MΩ Min
5. Operating Temperature Range: · 25·· 80·
6. Operating Force : 8-30N
7. Operating Life : 5,000Cycles

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Shell	——	1	SUS	Natural	——
②	Contact	——	5	All	Au Plated	——
①	Housing	——	1	LCP	Black	——

APPROVALS		DATE
DRAWN		
CHECKED		
APPROVALS		

TITLE:

PART NO.

TOLERANCES ARE: 30~.. ±0.30; 10~30 ±0.25; 5~10 ±0.20; ~ 5 ±0.15; ANGLE ±2°

UNIT: mm | SCALE: 1:1 | PROJ:

DRAWING NO. ——

SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——