

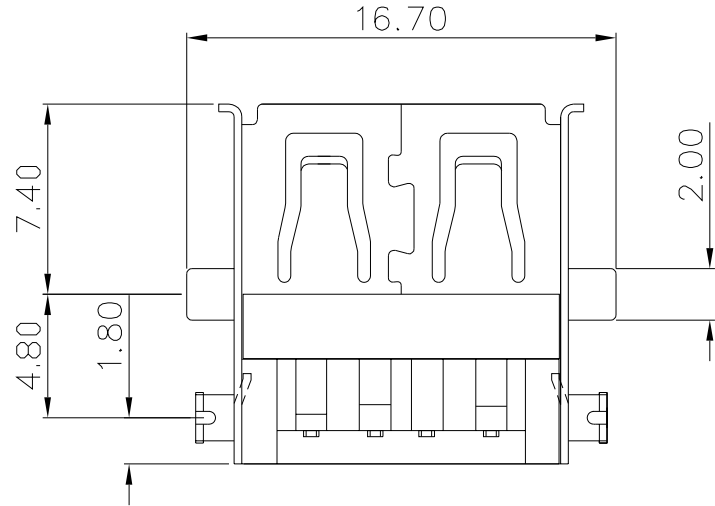
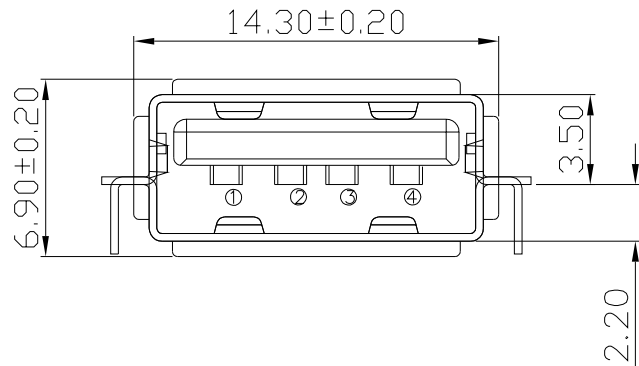
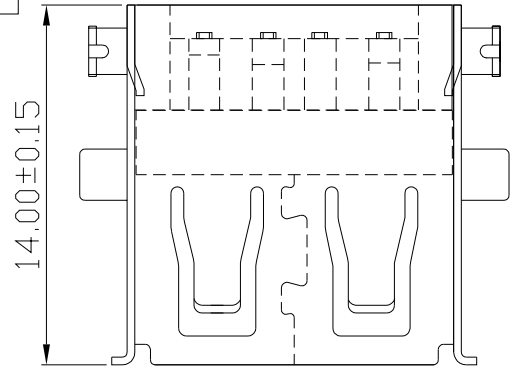


ROHS

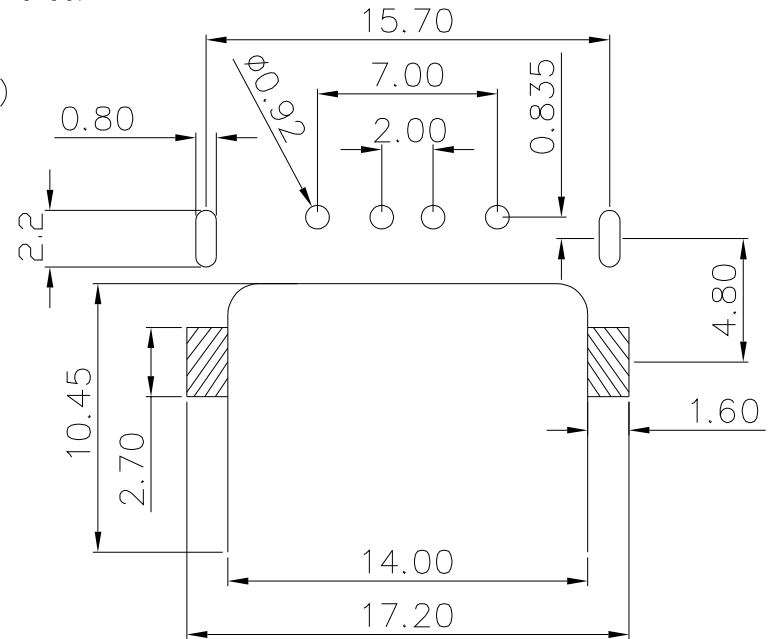

- NOTE:
ELECTRICAL PERFORMANCE,
1.Current Rating:1.5A contact terminal
2.Voltage Rating:30V DC
3.Contact Resistance:30 milliohms MAX
4.Dielectric Withstanding Voitage:500VAC AT Sea Level
5.Lnsulation Resistance:1000MEGA ohms MIN
6.Cnnecter Mate and Unmate Force:
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
7.Terminal Retenion:1.0kgf(MIN)

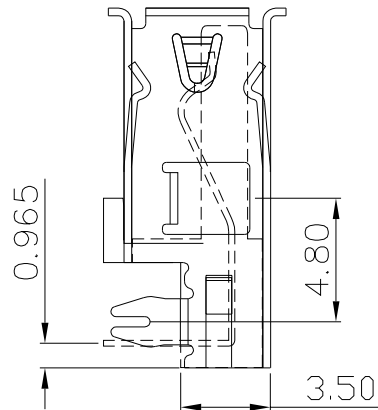

Recommended PCB Layout

③	Shell	—	1	Copper Alloy SPCC	Tin Plated	—
②	Terminal	—	4	Copper Alloy	Au/Tin Plated	—
①	Housing	—	1	LCP	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATFRIAI	FINISHING	REMARK
APPROVALS			DATE			
DRAWN			2022.01.20			
CHECKED				TITLE:		
APPROVALS				PART NO.		
TOLERANCES ARE			30~100±0.30 10~30±0.25 5~10±0.20 ~5±0.15	ANGLE ±2°	UNIT: mm SCALE: 1:1	PROJ: SHEET 1 OF 1

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.